


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.31V I:0.3261A P:39.071W PF:0.9959 Freq:59.98Hz Lamp Flux:5252.41x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 134.43 lm/W			
MODEL		I _{max} (cd)	1679	S/MH(C0/180)	1.31
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120-277	TOTAL FLUX(lm)	5252.4	h UP, DN(C0-180)	0.0,49.9
NOMINAL FLUX(lm)	5252.41	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.0,50.1
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	120	h down(%)	100.0	CIBSE SHR MAX	1.50

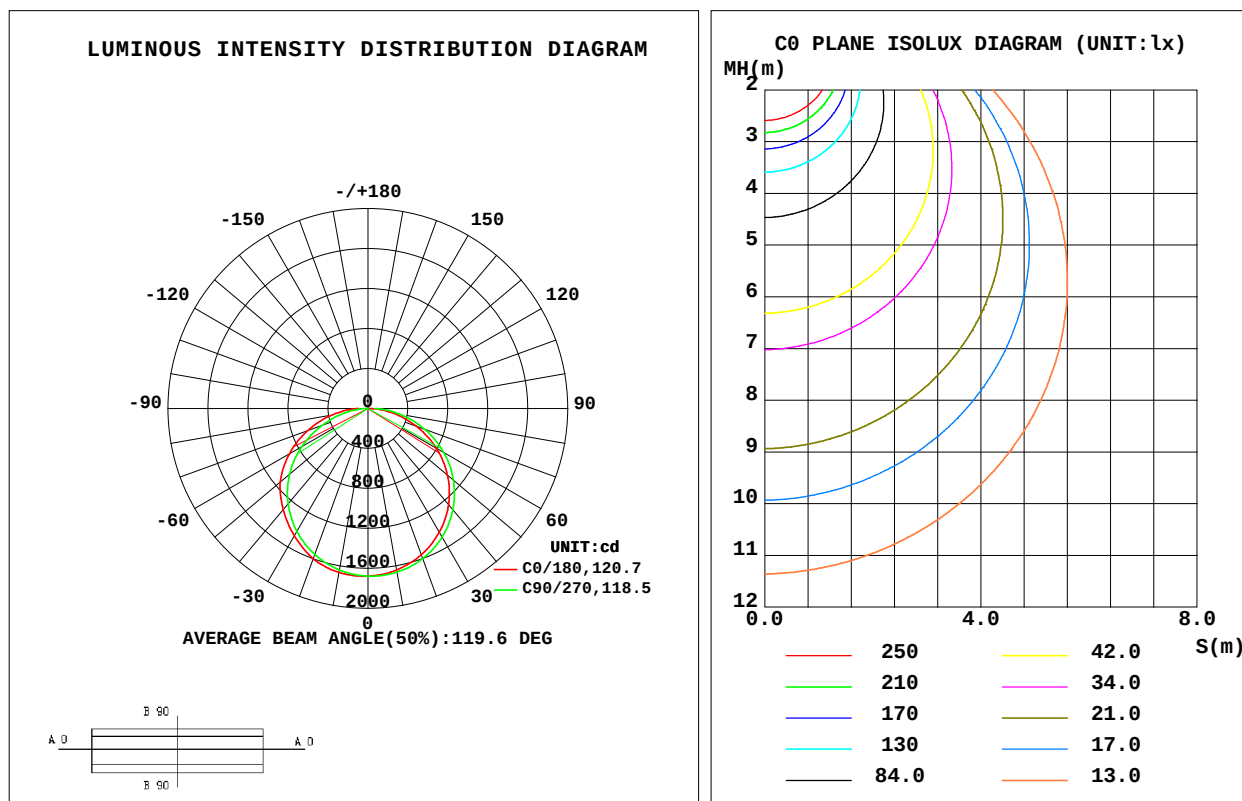

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-03-20

α Range: 0 - 90DEG
α Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:8.300m [K=1.0964]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

g	C0	C90	C180	C270					g	F zone	F total	%lum, lamp
10	1641	1663	1665	1641					0- 10	158.9	158.9	3.03, 3.03
20	1558	1599	1601	1556					10- 20	458.1	617.0	11.7, 11.7
30	1429	1485	1473	1422					20- 30	701.2	1318	25.1, 25.1
40	1255	1323	1321	1245					30- 40	859.9	2178	41.5, 41.5
50	1039	1118	1146	1025					40- 50	917.3	3095	58.9, 58.9
60	788.7	873.8	909.0	765.4					50- 60	859.8	3955	75.3, 75.3
70	512.0	599.5	639.2	483.1					60- 70	690.5	4646	88.4, 88.4
80	235.1	316.1	354.5	207.8					70- 80	440.6	5086	96.8, 96.8
90	2.901	66.58	90.67	4.071					80- 90	166.1	5252	100, 100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-03-20

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:8.300m [K=1.0964]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINANCE LIMITATION CURVES

Test:U:120.31V I:0.3261A P:39.071W PF:0.9959 Freq:59.98Hz Lamp Flux:5252.41x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

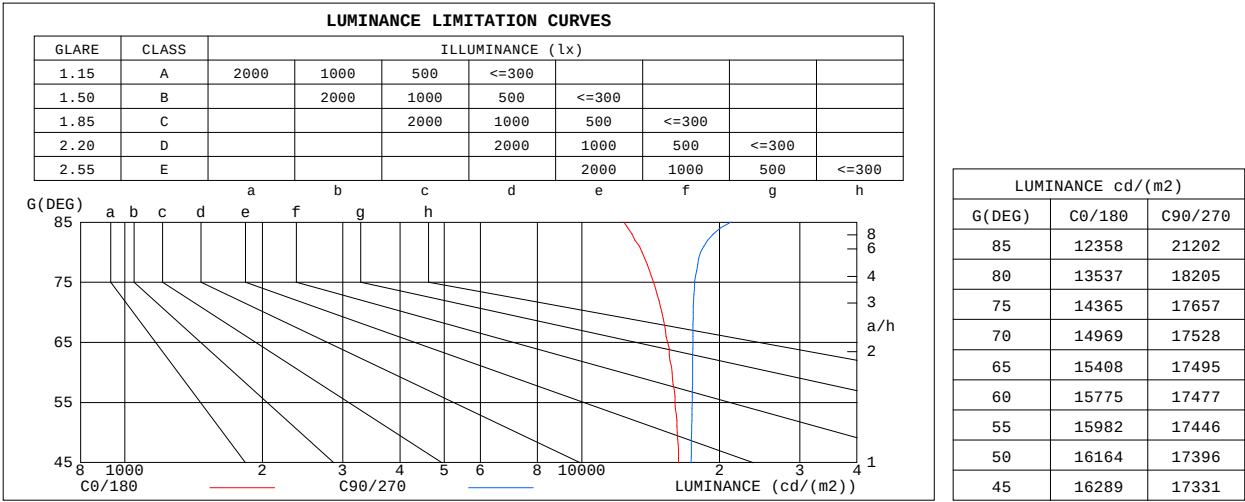

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-03-20


g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:8.300m [K=1.0964]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.31V I:0.3261A P:39.071W PF:0.9959 Freq:59.98Hz Lamp Flux:5252.41x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.03	.98	.94	1.00	.96	.92	.96	.93	.89	.92	.89	.87	.88	.86	.84	.82
2.0	.89	.82	.75	.87	.80	.75	.83	.78	.73	.80	.75	.71	.77	.73	.69	.67
3.0	.78	.69	.62	.76	.68	.62	.73	.66	.60	.70	.64	.59	.67	.63	.58	.56
4.0	.68	.59	.52	.67	.58	.52	.64	.57	.51	.62	.56	.50	.60	.54	.50	.47
5.0	.61	.52	.45	.60	.51	.44	.58	.50	.44	.56	.49	.43	.54	.48	.43	.41
6.0	.55	.45	.39	.54	.45	.39	.52	.44	.38	.50	.43	.38	.49	.42	.38	.35
7.0	.50	.40	.34	.49	.40	.34	.47	.39	.34	.46	.39	.34	.44	.38	.33	.31
8.0	.45	.36	.30	.44	.36	.30	.43	.35	.30	.42	.35	.30	.41	.34	.30	.28
9.0	.41	.33	.27	.41	.33	.27	.40	.32	.27	.38	.32	.27	.37	.31	.27	.25
10.0	.38	.30	.25	.38	.30	.25	.37	.29	.24	.36	.29	.24	.35	.29	.24	.22

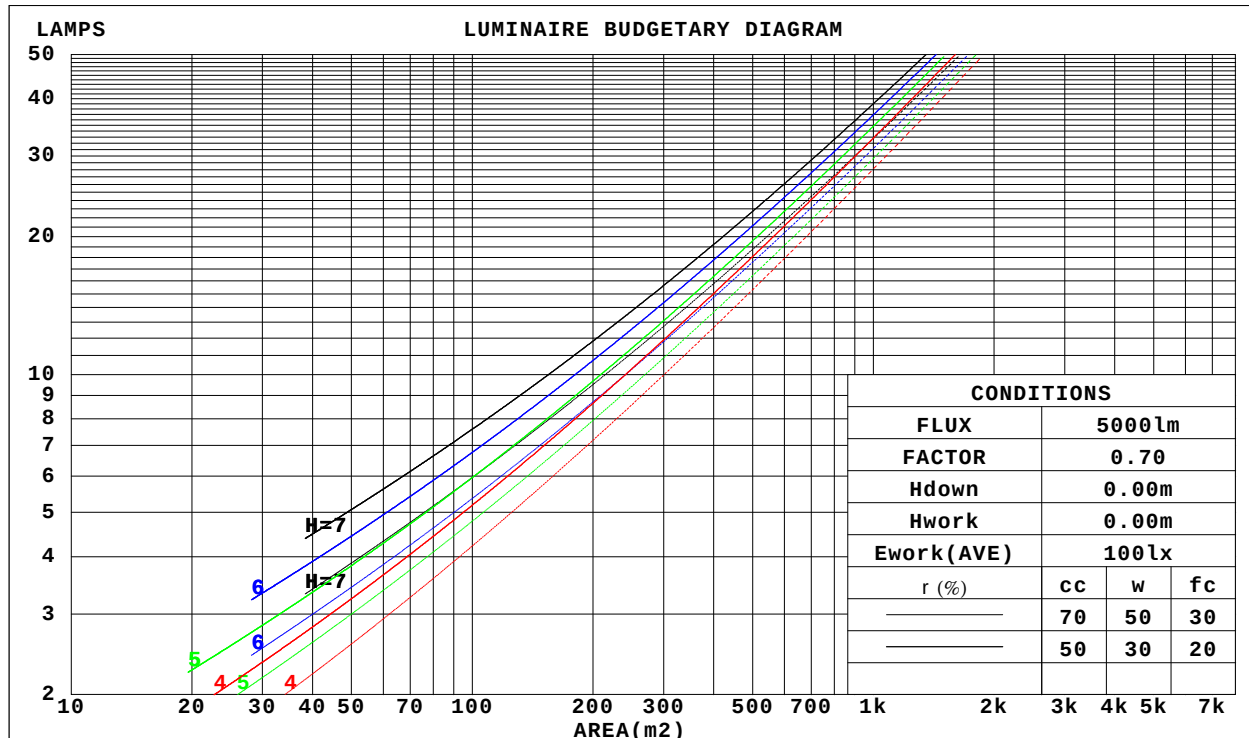

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-03-20

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:8.300m [K=1.0964]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

WEC AND CCEC

Test:U:120.31V I:0.3261A P:39.071W PF:0.9959 Freq:59.98Hz Lamp Flux:5252.41x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:100-277v		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

r c c	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r f c	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.333	.190	.060	.326	.186	.059	.313	.179	.057	.300	.173	.056	.289	.168	.054	
2.0	.308	.169	.052	.301	.166	.051	.289	.161	.050	.278	.156	.049	.268	.152	.048	
3.0	.282	.150	.045	.276	.148	.045	.266	.144	.044	.256	.140	.043	.247	.137	.042	
4.0	.258	.134	.039	.253	.132	.039	.244	.129	.039	.235	.126	.038	.227	.123	.038	
5.0	.237	.121	.035	.233	.120	.035	.225	.117	.034	.217	.115	.034	.210	.112	.034	
6.0	.219	.110	.031	.215	.109	.031	.208	.107	.031	.201	.105	.031	.195	.103	.030	
7.0	.203	.101	.029	.200	.100	.028	.193	.098	.028	.187	.096	.028	.182	.094	.028	
8.0	.190	.093	.026	.186	.092	.026	.181	.090	.026	.175	.089	.026	.170	.087	.025	
9.0	.177	.086	.024	.175	.085	.024	.169	.084	.024	.164	.082	.024	.160	.081	.023	
10.0	.166	.080	.022	.164	.079	.022	.159	.078	.022	.155	.077	.022	.150	.076	.022	

r c c	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r f c	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.182	.156	.133	.156	.134	.114	.106	.092	.079	.061	.053	.046	.020	.017	.015	
2.0	.174	.132	.096	.149	.113	.083	.102	.079	.058	.059	.046	.034	.019	.015	.011	
3.0	.167	.114	.073	.143	.099	.063	.098	.069	.044	.057	.040	.026	.018	.013	.009	
4.0	.159	.101	.057	.136	.087	.050	.094	.061	.035	.054	.036	.021	.017	.012	.007	
5.0	.151	.091	.046	.130	.079	.040	.090	.055	.028	.052	.032	.017	.017	.011	.006	
6.0	.144	.083	.038	.124	.071	.033	.085	.050	.024	.050	.029	.014	.016	.010	.005	
7.0	.137	.076	.033	.118	.066	.028	.082	.046	.020	.047	.027	.012	.015	.009	.004	
8.0	.131	.070	.028	.112	.061	.025	.078	.043	.017	.045	.025	.010	.015	.008	.003	
9.0	.124	.065	.025	.107	.056	.022	.074	.040	.015	.043	.023	.009	.014	.008	.003	
10.0	.118	.061	.022	.102	.053	.019	.071	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-03-20

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:8.300m [K=1.0964]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

UGR(Unified Glare Rating) Table

Test:U:120.31V I:0.3261A P:39.071W PF:0.9959 Freq:59.98Hz Lamp Flux:5252.41x1 lm											
NAME:					TYPE:			WEIGHT:			
SPEC.:100-277v					DIM.:			SERIAL No.:			
MFR.:					SUR.:			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.5	24.1	22.8	24.3	24.5	22.9	24.5	23.2	24.7	24.9	
	3H	24.2	25.6	24.5	25.8	26.1	24.7	26.2	25.0	26.4	
	4H	24.8	26.2	25.2	26.5	26.7	25.5	26.9	25.8	27.2	
	6H	25.4	26.7	25.7	26.9	27.2	26.2	27.5	26.5	27.8	
	8H	25.5	26.8	25.9	27.1	27.4	26.5	27.8	26.8	28.1	
	12H	25.7	26.9	26.0	27.2	27.5	26.8	28.0	27.1	28.3	
4H	2H	23.2	24.6	23.6	24.9	25.1	23.5	24.9	23.8	25.2	
	3H	25.1	26.3	25.4	26.6	26.9	25.5	26.7	25.9	27.0	
	4H	25.9	27.0	26.3	27.3	27.7	26.5	27.6	26.8	27.9	
	6H	26.6	27.6	27.0	27.9	28.3	27.3	28.3	27.7	28.7	
	8H	26.8	27.7	27.2	28.1	28.5	27.7	28.6	28.1	29.0	
	12H	27.0	27.8	27.4	28.2	28.6	28.0	28.9	28.5	29.3	
8H	4H	26.3	27.2	26.7	27.6	28.0	26.8	27.7	27.2	28.1	
	6H	27.1	27.9	27.6	28.3	28.7	27.8	28.6	28.3	29.0	
	8H	27.5	28.2	27.9	28.6	29.1	28.3	29.0	28.8	29.4	
	12H	27.8	28.4	28.2	28.8	29.3	28.8	29.4	29.2	29.8	
12H	4H	26.3	27.2	26.8	27.6	28.0	26.8	27.7	27.2	28.0	
	6H	27.2	27.9	27.7	28.4	28.8	27.9	28.6	28.4	29.0	
	8H	27.7	28.3	28.1	28.7	29.2	28.4	29.0	28.9	29.5	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.1					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.1 / - 0.4					+ 0.1 / - 0.3					

CIE Pub.117, 5252 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 5.8$)

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-03-20

g Range: 0 - 90DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity:65.0%
 Test Distance:8.300m [K=1.0964]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

UTILIZATION FACTORS TABLE

Test:U:120.31V I:0.3261A P:39.071W PF:0.9959 Freq:59.98Hz Lamp Flux:5252.41x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	44	37	55	44	37	54	43	36	30
0.80	66	54	46	65	53	46	63	52	46	38
1.00	74	63	55	73	62	55	71	63	54	47
1.25	81	70	63	80	70	62	77	68	62	54
1.50	86	76	69	85	75	68	82	73	67	59
2.00	93	84	77	91	83	77	88	81	75	67
2.50	97	89	83	95	88	82	91	85	80	71
3.00	101	94	88	99	92	87	95	89	84	76
4.00	105	99	94	103	97	93	98	94	90	81
5.00	108	103	98	105	101	97	101	97	93	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-03-20

g Range: 0 - 90DEG
 g Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.400
 Humidity:65.0%
 Test Distance:8.300m [K=1.0964]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOCANDELA DIAGRAM

Test:U:120.31V I:0.3261A P:39.071W PF:0.9959 Freq:59.98Hz Lamp Flux:5252.41x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

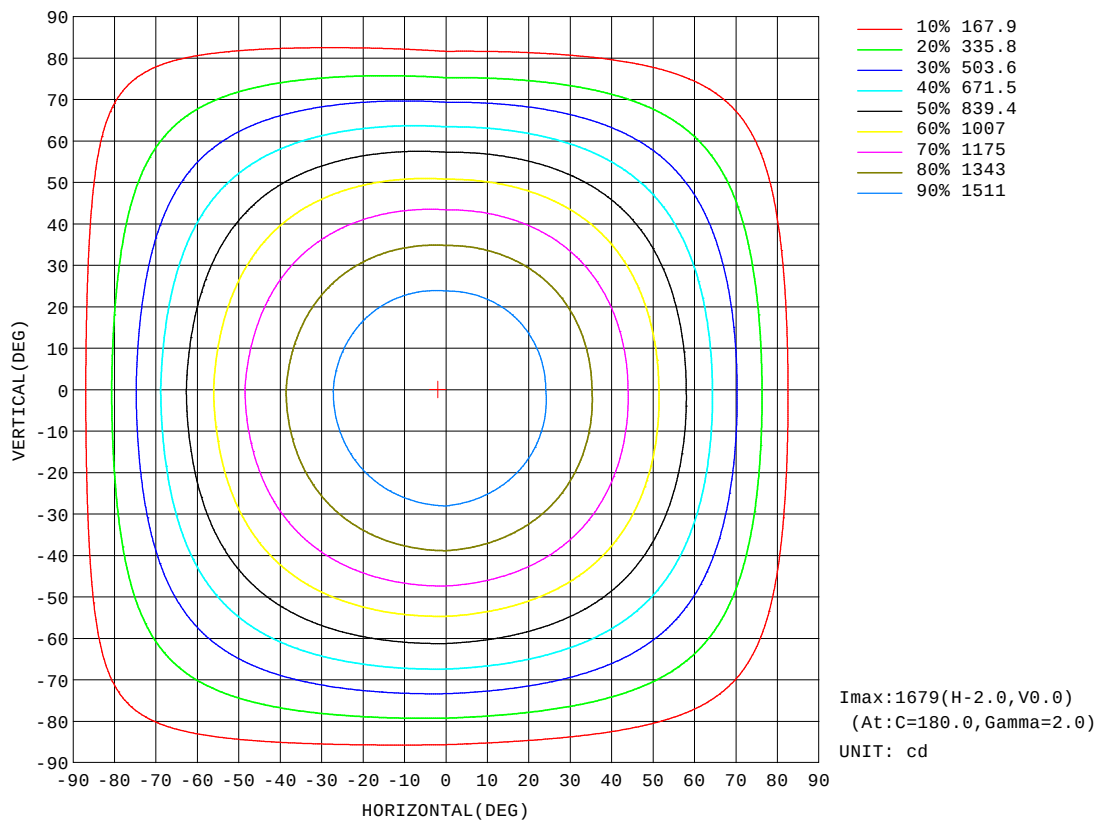

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-03-20


g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:8.300m [K=1.0964]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

AAI Figure

Test:U:120.31V I:0.3261A P:39.071W PF:0.9959 Freq:59.98Hz Lamp Flux:5252.41x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Flux out:3955 lm

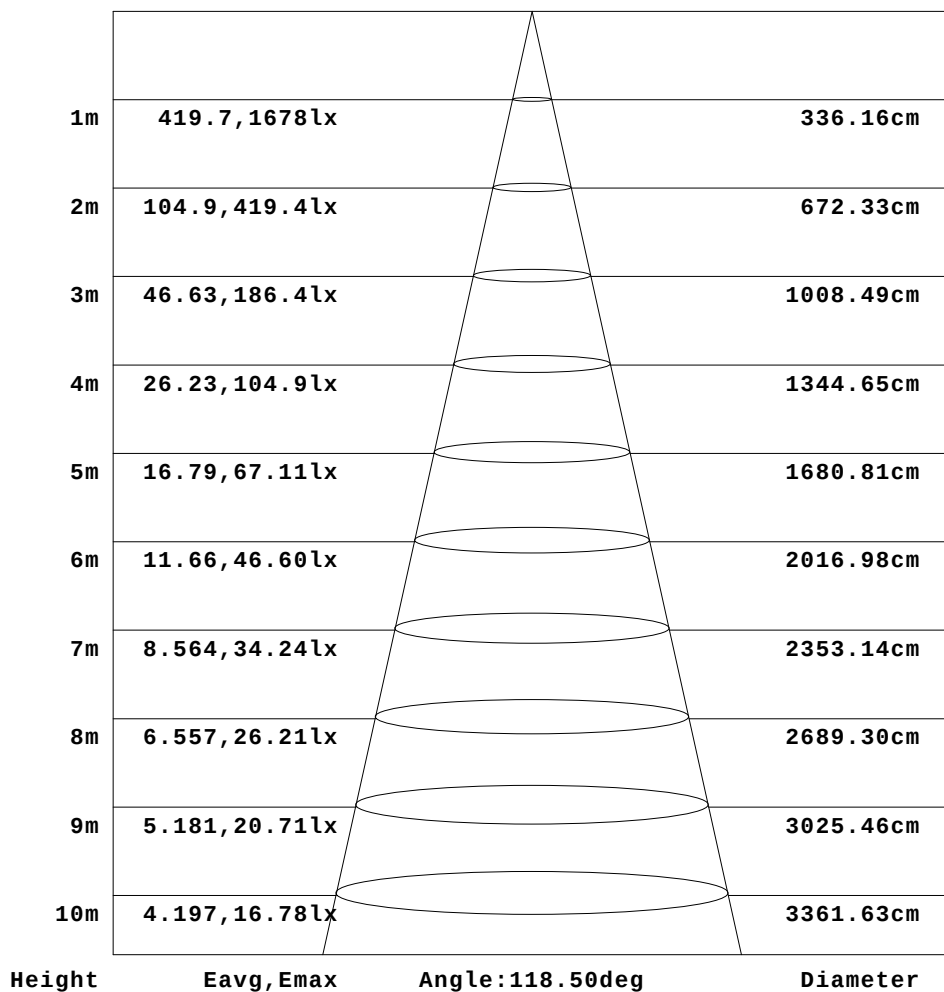

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-03-20

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:8.300m [K=1.0964]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOLUX DIAGRAM

Test:U:120.31V I:0.3261A P:39.071W PF:0.9959 Freq:59.98Hz Lamp Flux:5252.41x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

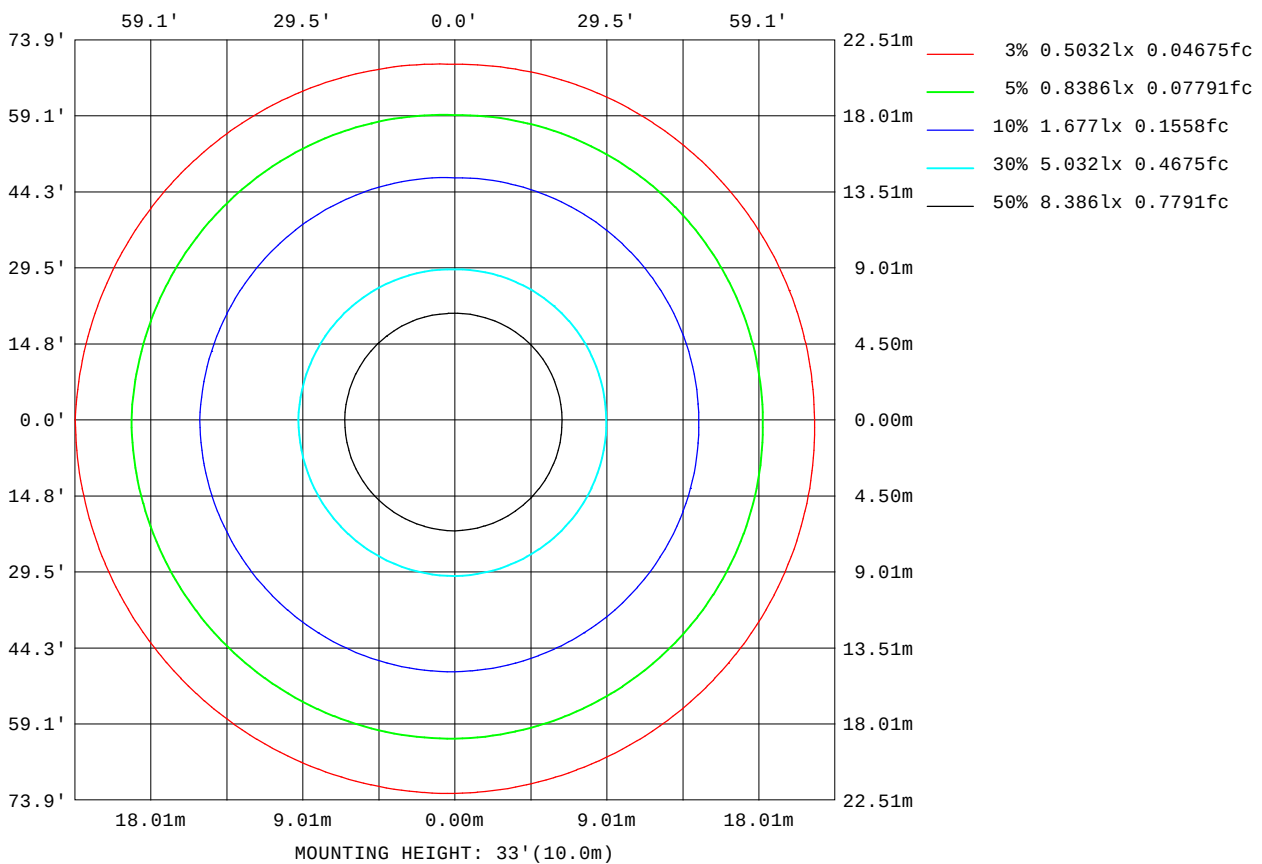

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-03-20

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 8.300m [K=1.0964]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LED Avg.L Report

Test:U:120.31V I:0.3261A P:39.071W PF:0.9959 Freq:59.98Hz Lamp Flux:5252.41x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	16902
L_0~180(75)av	16786
L_0~180(85)av	18696
L_90~270(65)av	16143
L_90~270(75)av	15432
L_90~270(85)av	15570
L_45(65)av	16521
L_45(75)av	16091
L_45(85)av	17138

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-03-20

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:8.300m [K=1.0964]
Remarks:

Planar Illuminance Curve

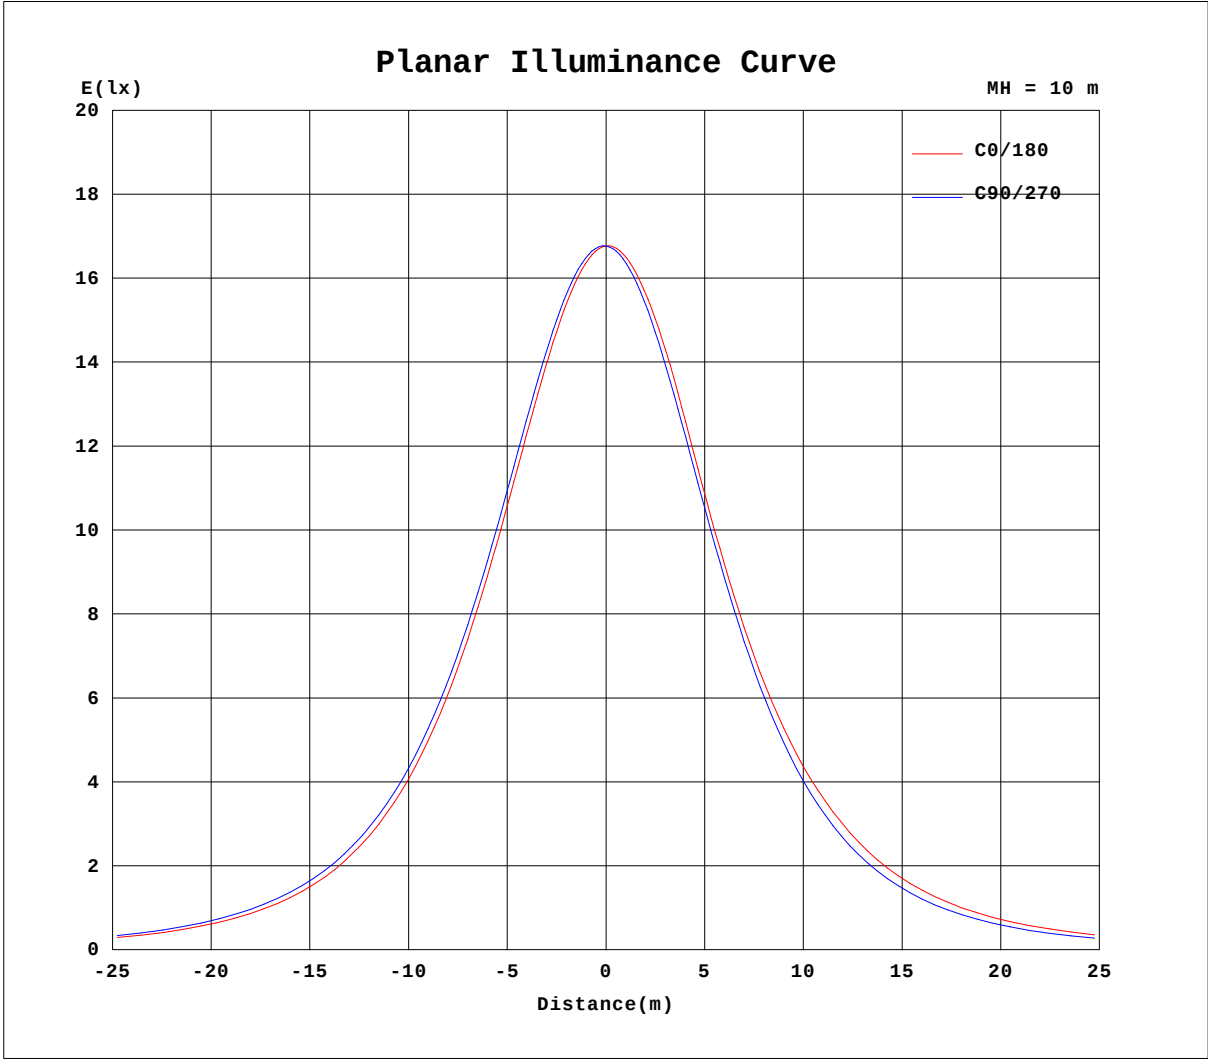

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-03-20

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:8.300m [K=1.0964]
Remarks:


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

Photometric Data Table [cd]



G/C	0.0	90.0	180.0	270.0
0.0	1677	1677	1677	1677
3.0	1672	1678	1679	1671
6.0	1661	1675	1676	1662
9.0	1647	1667	1669	1647
12.0	1629	1655	1656	1628
15.0	1606	1637	1641	1604
18.0	1579	1616	1620	1576
21.0	1548	1590	1590	1544
24.0	1512	1560	1553	1508
27.0	1472	1525	1514	1467
30.0	1429	1485	1473	1422
33.0	1382	1441	1429	1374
36.0	1330	1394	1384	1321
39.0	1274	1341	1336	1264
42.0	1217	1286	1288	1204
45.0	1152	1226	1237	1140
48.0	1087	1162	1185	1072
51.0	1016	1095	1125	1000
54.0	941.4	1025	1056	924.8
57.0	868.0	950.4	983.8	845.6
60.0	788.7	873.8	909.0	765.4
63.0	704.8	793.8	830.9	681.4
66.0	621.9	711.5	749.8	597.0
69.0	539.6	628.1	667.3	512.0
72.0	455.8	542.7	583.1	426.1
75.0	371.8	457.0	497.1	341.8
78.0	288.8	372.6	412.9	260.6
81.0	209.1	289.2	327.0	181.7
84.0	131.9	209.9	244.9	109.2
87.0	61.46	135.9	166.5	44.74
90.0	2.901	66.58	90.67	4.071

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-03-20

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 8.300m [K=1.0964]
Remarks:

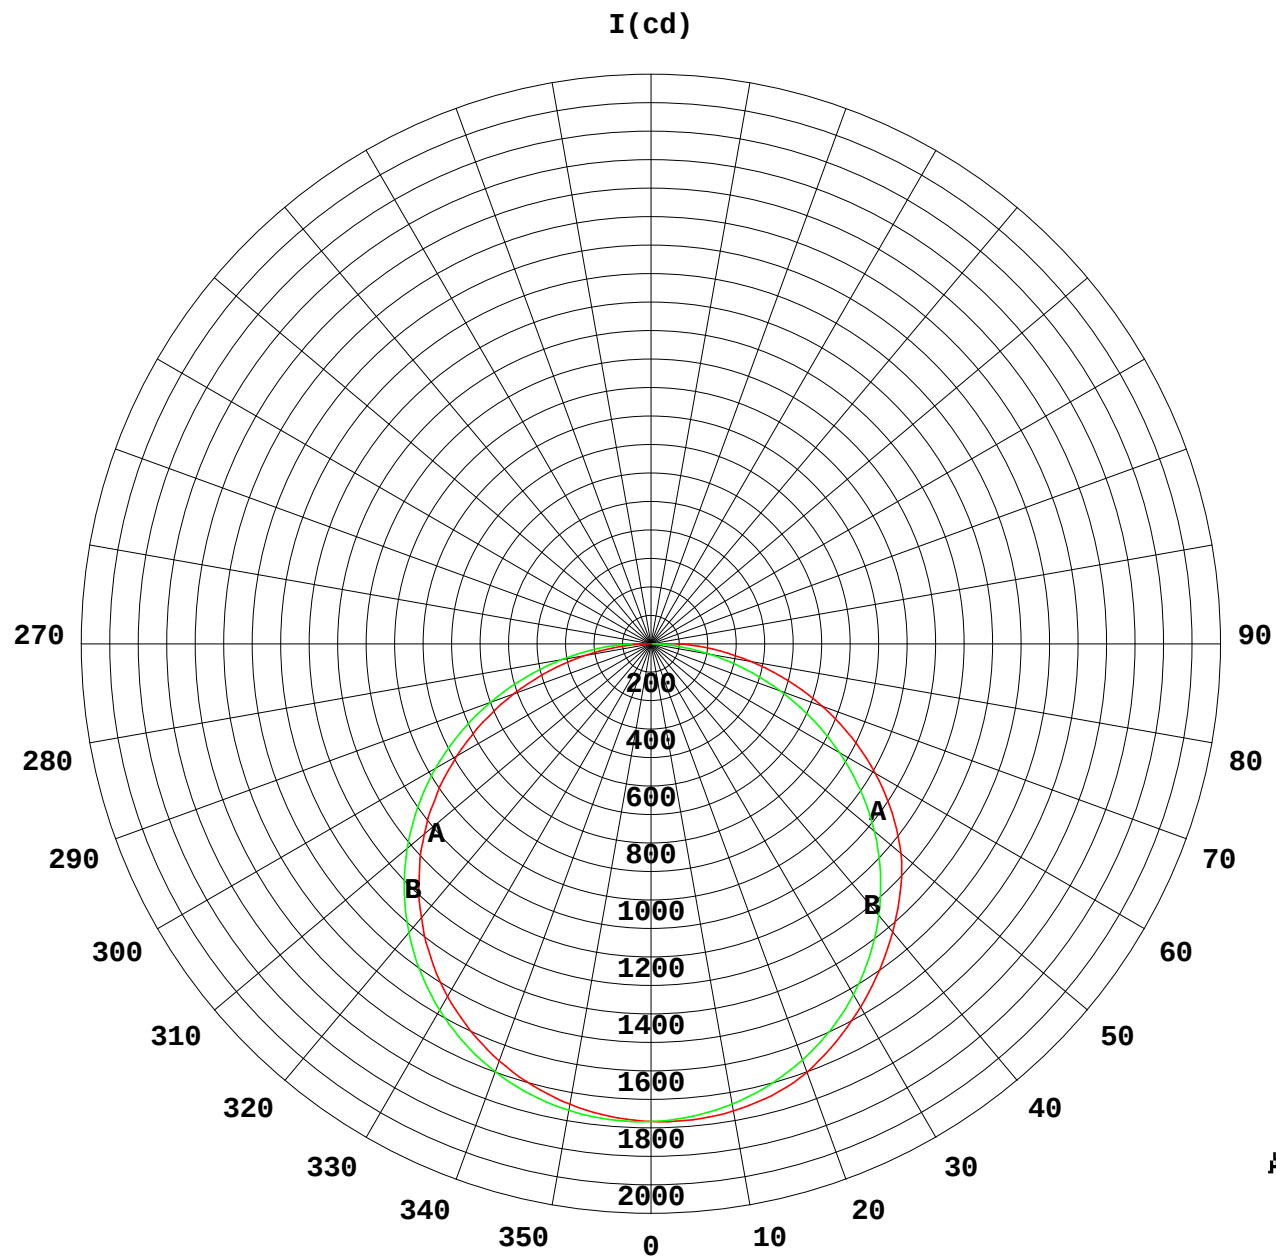

1000 lm $K = 1$

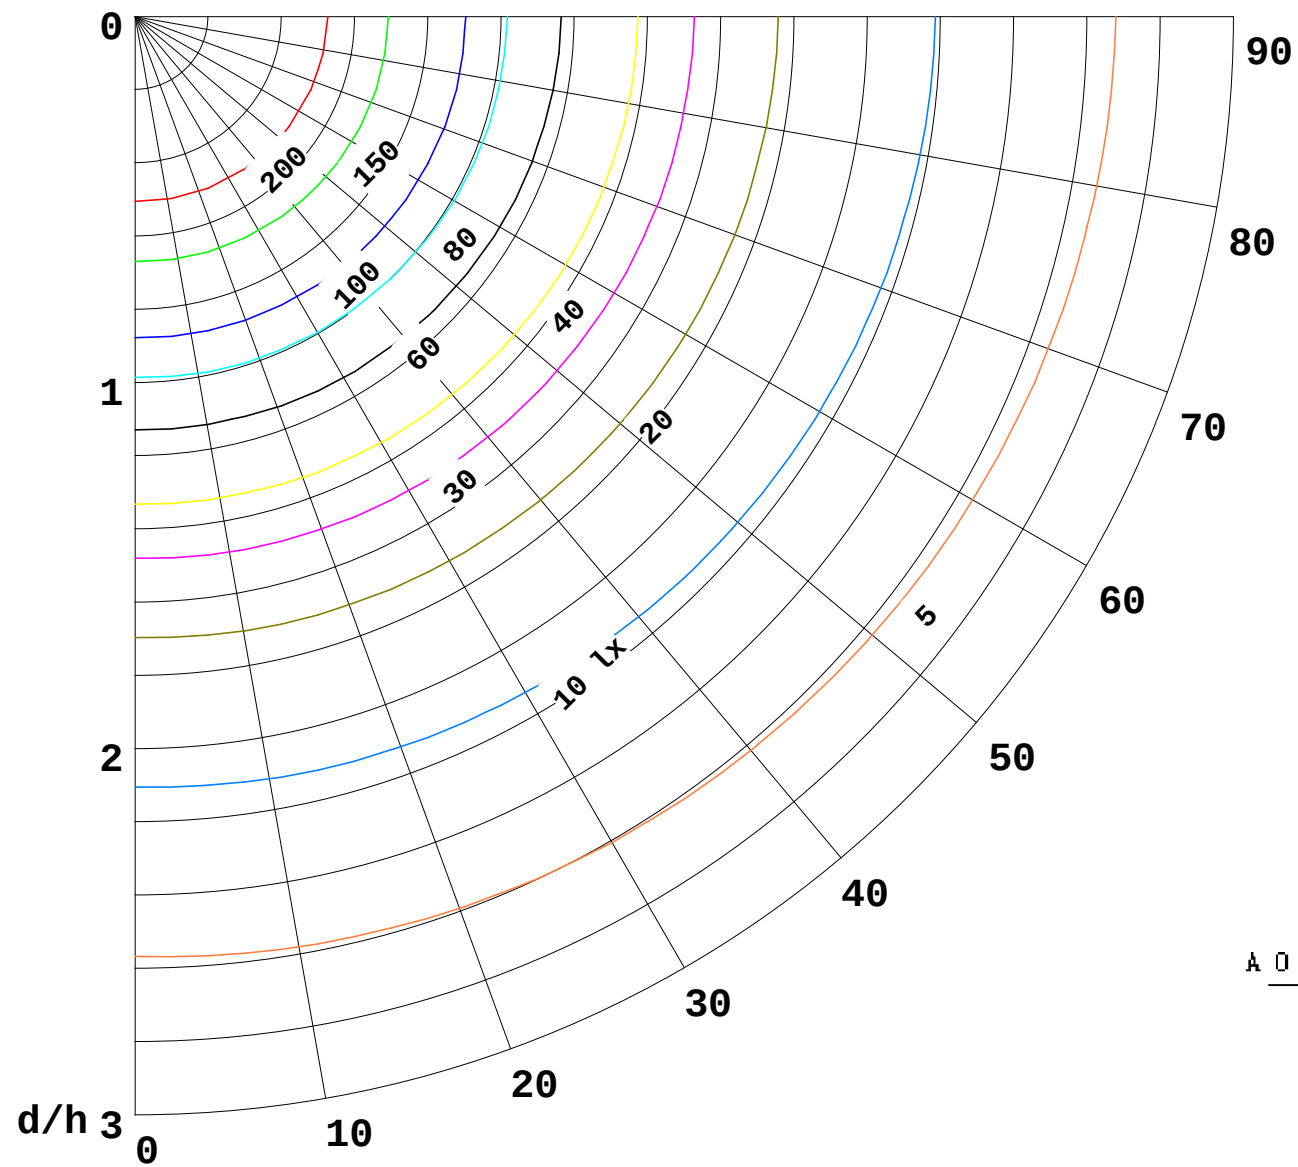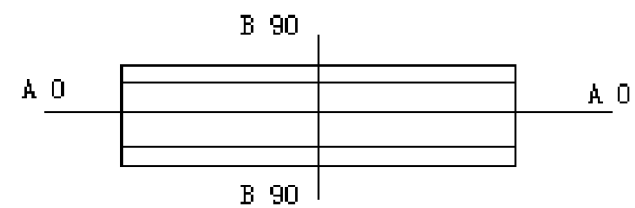

F

=

5000 lm

K

=

0.7

Hcc

=

0.0 m

Hfc

=

0.0 m

Eave

=

100 lx

Pcc

70

Pw

50

Pfc

30

Pcc

50

Pw

30

Pfc

20

