


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.33V I:0.2546A P:30.352W PF:0.9908 Freq:59.98Hz Lamp Flux:3968.2x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 130.74 lm/W			
MODEL		I _{max} (cd)	1271	S/MH(C0/180)	1.33
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	120-277	TOTAL FLUX(lm)	3968.2	h UP, DN(C0-180)	0.0,48.5
NOMINAL FLUX(lm)	3968.2	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.0,51.5
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	120	h down(%)	100.0	CIBSE SHR MAX	1.50

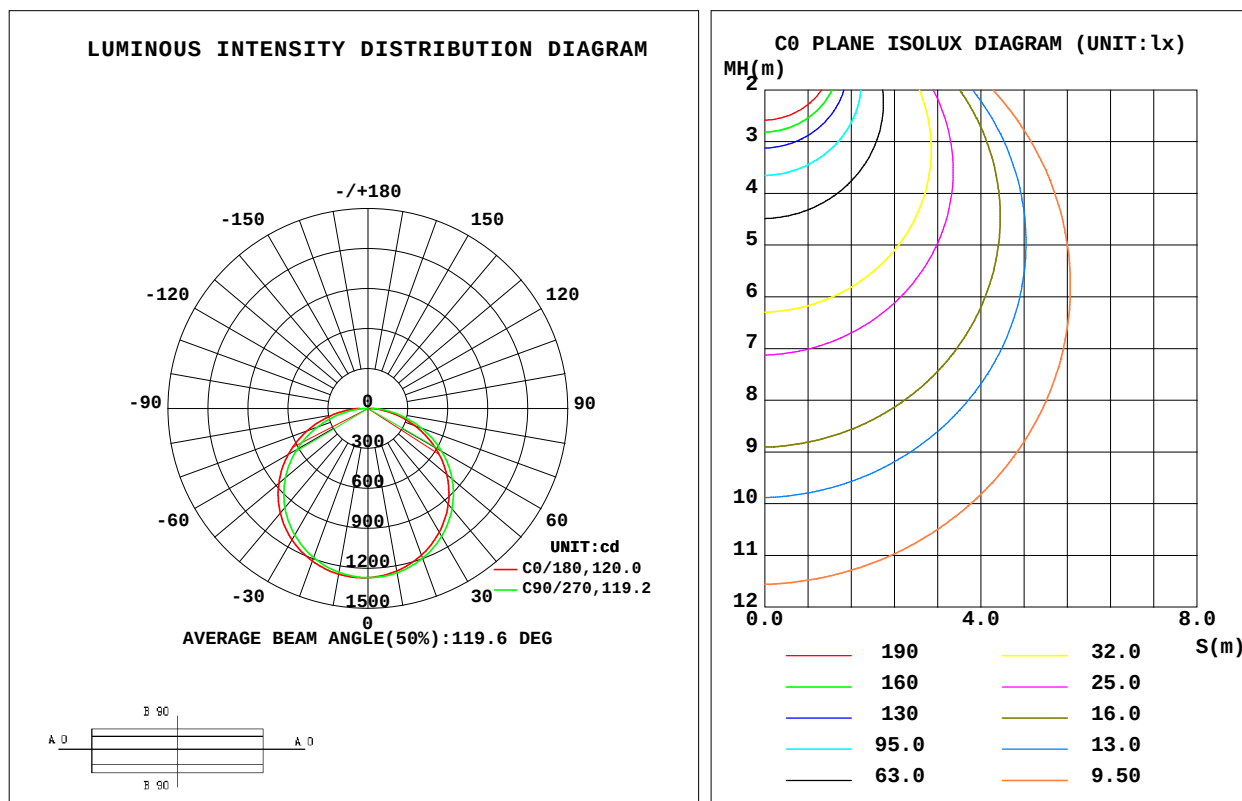

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:13 March 2024

α Range: 0 - 90DEG
α Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:8.300m [K=1.0723]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

g	C0	C90	C180	C270					g	F zone	F total	%lum, lamp
10	1238	1252	1263	1249					0- 10	120.3	120.3	3.03, 3.03
20	1172	1197	1219	1192					10- 20	346.6	466.9	11.8, 11.8
30	1071	1107	1140	1098					20- 30	532.0	998.9	25.2, 25.2
40	936.9	982.0	1024	969.9					30- 40	654.1	1653	41.7, 41.7
50	772.7	825.5	874.0	809.7					40- 50	696.7	2350	59.2, 59.2
60	581.0	637.1	691.2	616.3					50- 60	651.7	3001	75.6, 75.6
70	370.3	423.6	482.5	399.1					60- 70	521.2	3523	88.8, 88.8
80	162.8	205.3	261.5	182.0					70- 80	326.9	3849	97, 97
90	0.8908	27.65	63.60	12.40					80- 90	118.8	3968	100, 100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:13 March 2024

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:8.300m [K=1.0723]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINANCE LIMITATION CURVES

Test:U:120.33V I:0.2546A P:30.352W PF:0.9908 Freq:59.98Hz Lamp Flux:3968.2x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

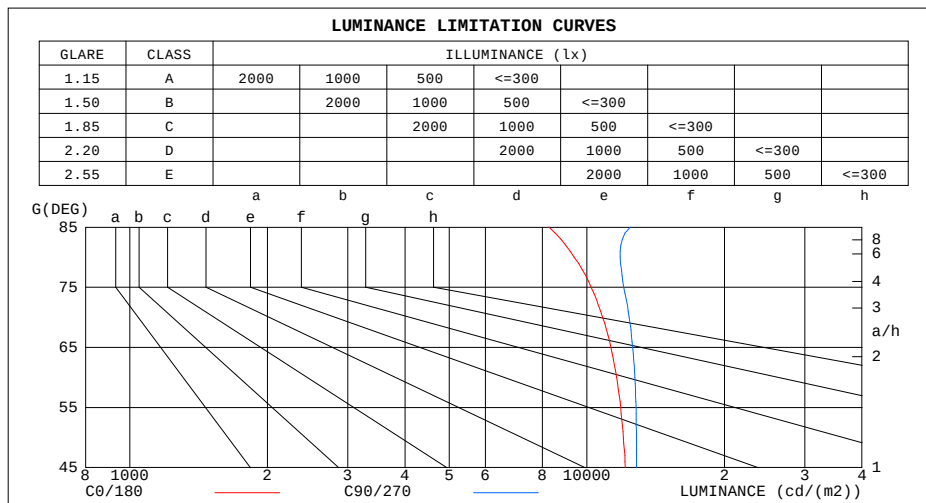

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	8259	12461
80	9377	11822
75	10218	12048
70	10827	12386
65	11292	12606
60	11620	12742
55	11873	12816
50	12022	12842
45	12142	12838

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 13 March 2024


g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 8.300m [K=1.0723]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.33V I:0.2546A P:30.352W PF:0.9908 Freq:59.98Hz Lamp Flux:3968.2x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.03	.98	.94	1.00	.96	.92	.96	.93	.90	.92	.89	.87	.89	.86	.84	.82
2.0	.89	.82	.76	.87	.80	.75	.83	.78	.73	.80	.75	.71	.77	.73	.70	.67
3.0	.78	.69	.62	.76	.68	.62	.73	.66	.61	.70	.64	.60	.68	.63	.59	.56
4.0	.69	.59	.52	.67	.59	.52	.65	.57	.51	.62	.56	.51	.60	.54	.50	.48
5.0	.61	.52	.45	.60	.51	.45	.58	.50	.44	.56	.49	.44	.54	.48	.43	.41
6.0	.55	.46	.39	.54	.45	.39	.52	.44	.38	.50	.43	.38	.49	.43	.38	.36
7.0	.50	.41	.34	.49	.40	.34	.47	.40	.34	.46	.39	.34	.44	.38	.33	.31
8.0	.45	.36	.30	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.34	.30	.28
9.0	.41	.33	.27	.41	.33	.27	.40	.32	.27	.39	.32	.27	.38	.31	.27	.25
10.0	.38	.30	.25	.38	.30	.25	.37	.29	.25	.36	.29	.24	.35	.29	.24	.23

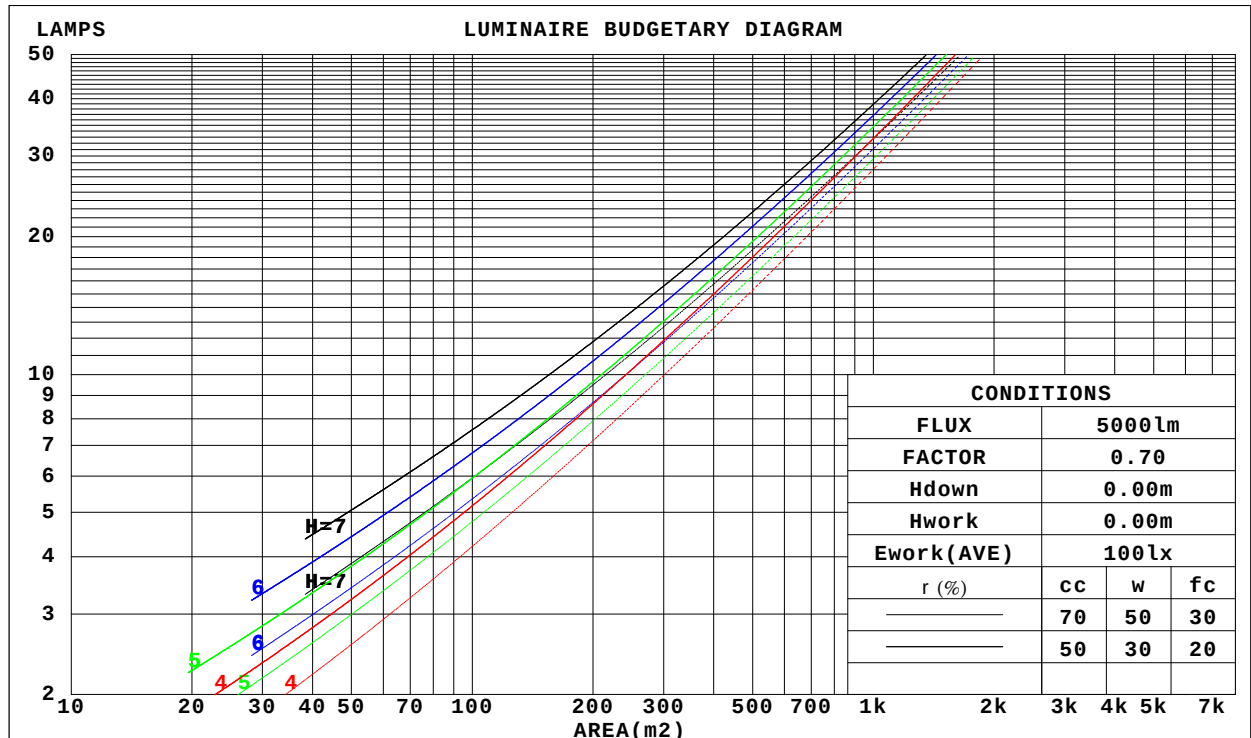

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:13 March 2024

g Range: 0 - 90DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity:65.0%
 Test Distance:8.300m [K=1.0723]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

WEC AND CCEC

Test:U:120.33V I:0.2546A P:30.352W PF:0.9908 Freq:59.98Hz Lamp Flux:3968.2x1 lm					
NAME:			TYPE:		WEIGHT:
SPEC.:100-277v			DIM.:		SERIAL No.:
MFR.:			SUR.:		Shielding Angle:

r CC	80%			70%			50%			30%			10%			0
r W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.331	.188	.060	.324	.185	.059	.310	.178	.057	.298	.172	.055	.287	.166	.054	
2.0	.306	.168	.051	.300	.165	.051	.288	.160	.050	.277	.155	.049	.267	.151	.048	
3.0	.281	.149	.045	.275	.147	.044	.265	.143	.044	.255	.140	.043	.246	.136	.042	
4.0	.257	.134	.039	.252	.132	.039	.243	.129	.039	.235	.126	.038	.227	.123	.037	
5.0	.237	.121	.035	.233	.119	.035	.224	.117	.034	.217	.114	.034	.209	.112	.034	
6.0	.219	.110	.031	.215	.109	.031	.208	.106	.031	.201	.104	.031	.194	.102	.030	
7.0	.203	.100	.028	.200	.099	.028	.193	.098	.028	.187	.096	.028	.181	.094	.028	
8.0	.189	.093	.026	.186	.092	.026	.180	.090	.026	.175	.089	.026	.170	.087	.025	
9.0	.177	.086	.024	.174	.085	.024	.169	.084	.024	.164	.082	.024	.159	.081	.023	
10.0	.166	.080	.022	.164	.079	.022	.159	.078	.022	.155	.077	.022	.150	.076	.022	

r c c	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r f c	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.182	.156	.133	.156	.134	.114	.106	.092	.079	.061	.053	.046	.020	.017	.015	
2.0	.174	.132	.096	.149	.113	.083	.102	.079	.058	.059	.046	.034	.019	.015	.011	
3.0	.167	.114	.073	.143	.099	.063	.098	.069	.044	.057	.040	.026	.018	.013	.009	
4.0	.159	.101	.057	.136	.087	.050	.094	.061	.035	.054	.036	.021	.017	.012	.007	
5.0	.151	.091	.046	.130	.079	.040	.090	.055	.028	.052	.032	.017	.017	.011	.006	
6.0	.144	.083	.038	.124	.071	.033	.085	.050	.024	.050	.029	.014	.016	.010	.005	
7.0	.137	.076	.033	.118	.066	.028	.081	.046	.020	.047	.027	.012	.015	.009	.004	
8.0	.130	.070	.028	.112	.061	.025	.078	.043	.017	.045	.025	.010	.015	.008	.003	
9.0	.124	.065	.025	.107	.056	.022	.074	.040	.015	.043	.023	.009	.014	.008	.003	
10.0	.118	.061	.022	.102	.053	.019	.071	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:13 March 2024

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:8.300m [K=1.0723]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

UGR(Unified Glare Rating) Table

Test:U:120.33V I:0.2546A P:30.352W PF:0.9908 Freq:59.98Hz Lamp Flux:3968.2x1 lm											
NAME:					TYPE:			WEIGHT:			
SPEC.:100-277v					DIM.:			SERIAL No.:			
MFR.:					SUR.:			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	21.4	23.0	21.7	23.2	23.4	21.7	23.3	22.0	23.5	23.7	
	3H	23.0	24.4	23.3	24.7	24.9	23.4	24.9	23.7	25.1	25.4
	4H	23.6	25.0	23.9	25.3	25.5	24.2	25.6	24.5	25.8	26.1
	6H	24.1	25.4	24.4	25.7	26.0	24.8	26.1	25.1	26.3	26.6
	8H	24.3	25.5	24.6	25.8	26.1	25.0	26.3	25.3	26.5	26.8
	12H	24.3	25.6	24.7	25.9	26.2	25.2	26.4	25.5	26.7	27.0
4H	2H	22.1	23.5	22.4	23.7	24.0	22.3	23.7	22.7	24.0	24.2
	3H	23.9	25.1	24.2	25.4	25.7	24.2	25.5	24.6	25.8	26.1
	4H	24.6	25.7	25.0	26.1	26.4	25.1	26.2	25.5	26.5	26.9
	6H	25.2	26.2	25.6	26.6	27.0	25.8	26.8	26.2	27.2	27.6
	8H	25.5	26.4	25.9	26.8	27.1	26.1	27.1	26.6	27.4	27.8
	12H	25.6	26.5	26.0	26.8	27.3	26.4	27.2	26.8	27.6	28.0
8H	4H	25.0	25.9	25.4	26.3	26.7	25.4	26.3	25.8	26.7	27.1
	6H	25.8	26.5	26.2	26.9	27.4	26.3	27.1	26.7	27.5	27.9
	8H	26.1	26.8	26.5	27.2	27.6	26.7	27.4	27.2	27.8	28.3
	12H	26.3	26.9	26.8	27.4	27.8	27.1	27.6	27.5	28.1	28.6
12H	4H	25.0	25.9	25.4	26.2	26.7	25.4	26.3	25.8	26.6	27.1
	6H	25.8	26.5	26.3	27.0	27.4	26.4	27.1	26.8	27.5	27.9
	8H	26.2	26.8	26.7	27.3	27.7	26.8	27.4	27.3	27.9	28.3
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.1 / - 0.4					+ 0.1 / - 0.3					

CIE Pub.117, 3968 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 4.8$)

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:13 March 2024

g Range: 0 - 90DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity:65.0%
 Test Distance:8.300m [K=1.0723]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

UTILIZATION FACTORS TABLE

Test:U:120.33V I:0.2546A P:30.352W PF:0.9908 Freq:59.98Hz Lamp Flux:3968.2x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	44	37	55	44	37	54	43	37	30
0.80	66	54	46	65	53	46	63	53	46	39
1.00	74	63	55	73	62	55	71	64	54	47
1.25	81	70	63	80	70	63	77	68	62	54
1.50	86	76	69	85	75	68	82	73	67	59
2.00	94	84	78	92	83	77	88	81	75	67
2.50	98	89	83	95	88	82	92	85	80	72
3.00	101	94	88	99	92	87	95	89	85	76
4.00	105	99	94	103	97	93	99	94	90	81
5.00	108	103	98	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:13 March 2024

g Range: 0 - 90DEG
 g Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.400
 Humidity:65.0%
 Test Distance:8.300m [K=1.0723]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOCANDELA DIAGRAM

Test:U:120.33V I:0.2546A P:30.352W PF:0.9908 Freq:59.98Hz Lamp Flux:3968.2x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

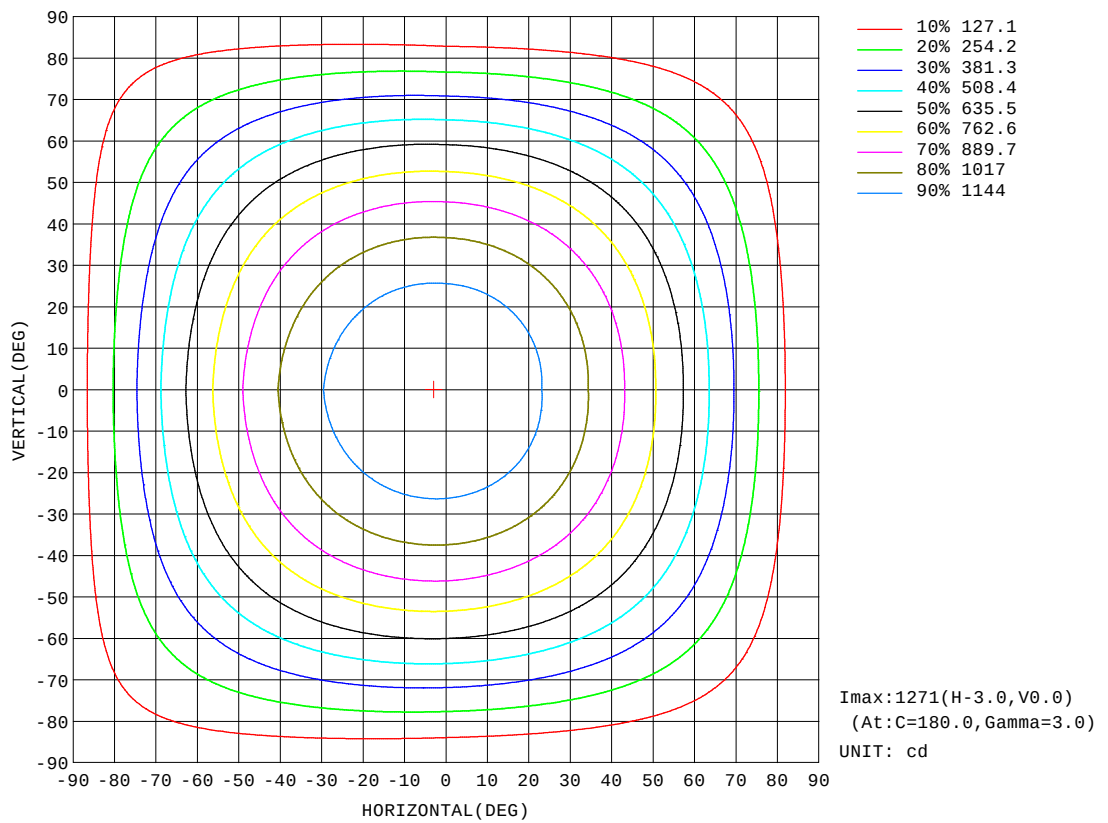


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:13 March 2024

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:8.300m [K=1.0723]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

AAI Figure

Test:U:120.33V I:0.2546A P:30.352W PF:0.9908 Freq:59.98Hz Lamp Flux:3968.2x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

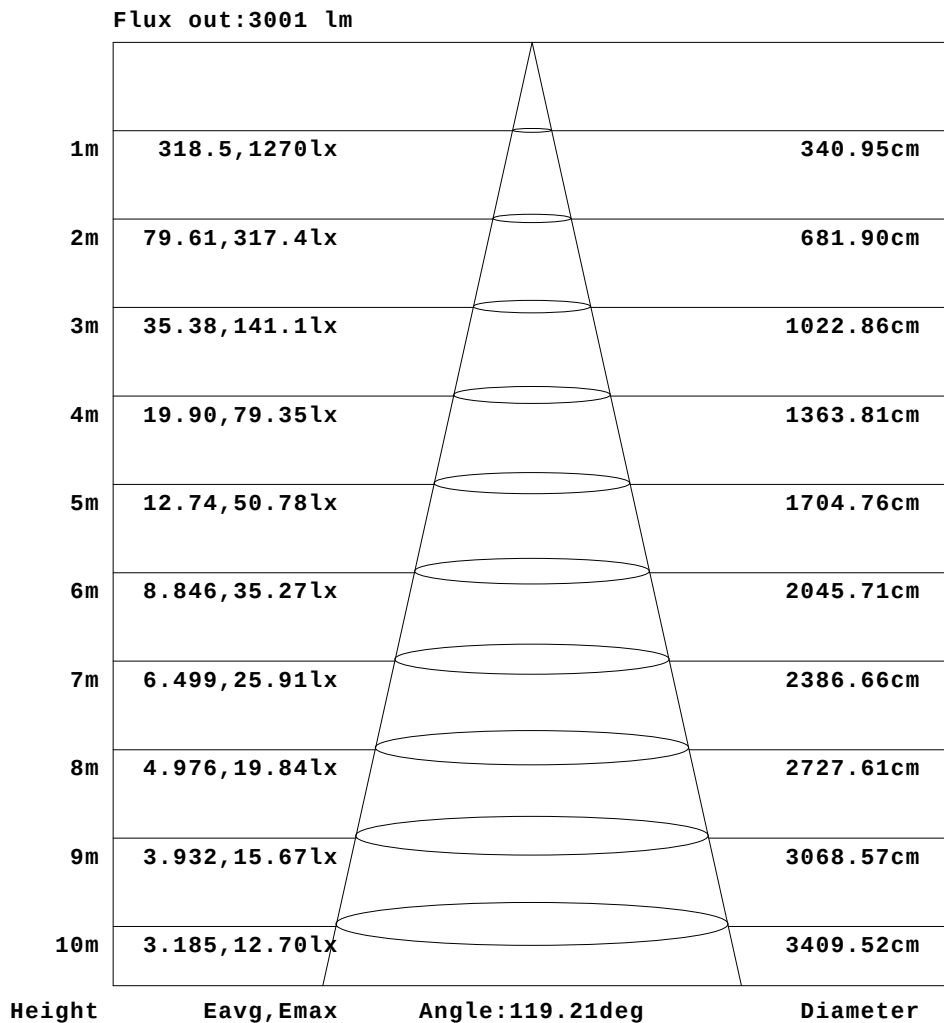

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:13 March 2024

g Range: 0 - 90DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity:65.0%
 Test Distance:8.300m [K=1.0723]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOLUX DIAGRAM

Test:U:120.33V I:0.2546A P:30.352W PF:0.9908 Freq:59.98Hz Lamp Flux:3968.2x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

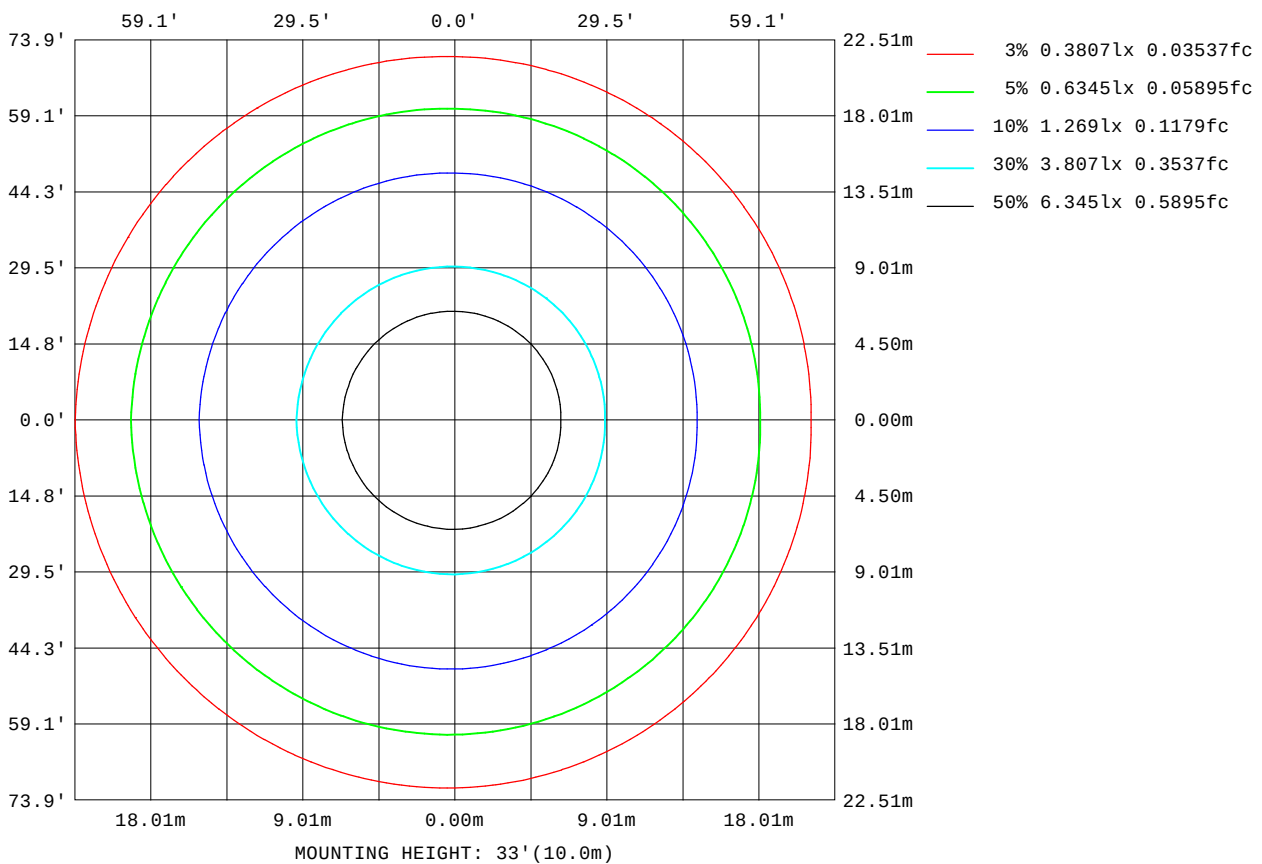

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 13 March 2024

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 8.300m [K=1.0723]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LED Avg.L Report

Test:U:120.33V I:0.2546A P:30.352W PF:0.9908 Freq:59.98Hz Lamp Flux:3968.2x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	12622
L_0~180(75)av	12301
L_0~180(85)av	13186
L_90~270(65)av	12329
L_90~270(75)av	11589
L_90~270(85)av	11224
L_45(65)av	12522
L_45(75)av	11986
L_45(85)av	12267

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:13 March 2024

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:8.300m [K=1.0723]
Remarks:

Planar Illuminance Curve

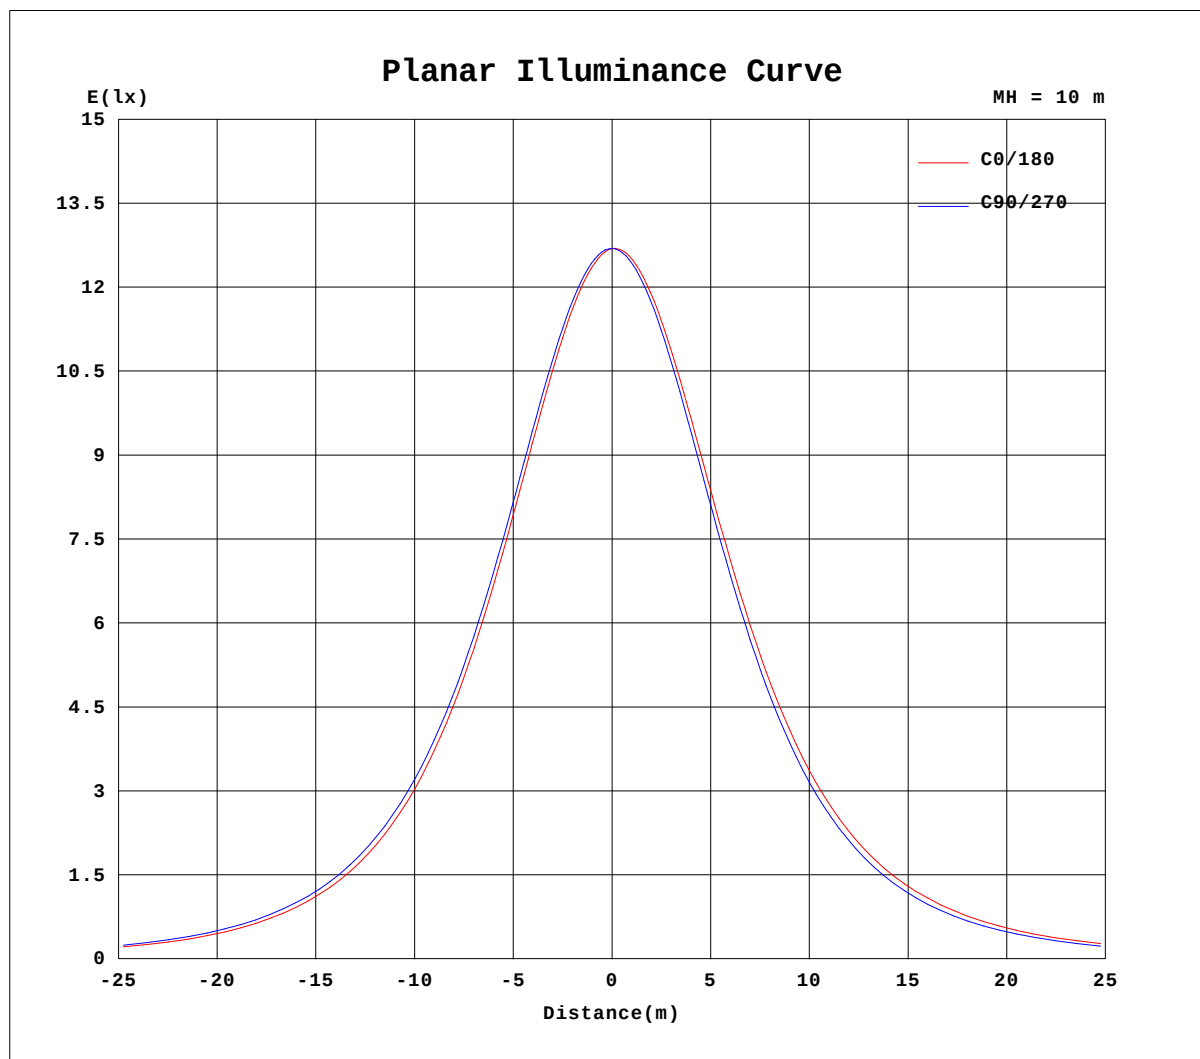

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 13 March 2024

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 8.300m [K=1.0723]
Remarks:


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

Photometric Data Table [cd]

G/C	0.0	90.0	180.0	270.0
0.0	1269	1270	1269	1270
3.0	1264	1268	1271	1267
6.0	1255	1263	1270	1262
9.0	1243	1255	1265	1253
12.0	1228	1244	1257	1241
15.0	1209	1229	1246	1225
18.0	1188	1211	1231	1206
21.0	1164	1189	1213	1184
24.0	1136	1165	1192	1158
27.0	1105	1137	1167	1130
30.0	1071	1107	1140	1098
33.0	1035	1073	1108	1063
36.0	994.7	1036	1074	1025
39.0	951.9	996.2	1037	984.0
42.0	907.5	953.7	996.7	940.6
45.0	858.6	907.8	952.9	893.8
48.0	808.2	859.1	906.3	843.8
51.0	755.9	808.2	857.2	791.6
54.0	698.9	753.5	804.2	735.7
57.0	640.7	696.4	749.0	676.8
60.0	581.0	637.1	691.2	616.3
63.0	519.1	575.0	630.7	552.5
66.0	455.9	511.0	567.9	487.4
69.0	392.2	445.9	504.1	421.4
72.0	327.8	379.5	438.4	354.4
75.0	264.5	311.8	372.3	288.1
78.0	203.1	247.5	305.3	223.6
81.0	143.9	185.0	240.3	161.4
84.0	89.14	126.7	177.9	104.7
87.0	39.91	74.24	119.2	54.21
90.0	0.8908	27.65	63.60	12.40


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 13 March 2024

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 8.300m [K=1.0723]
Remarks:

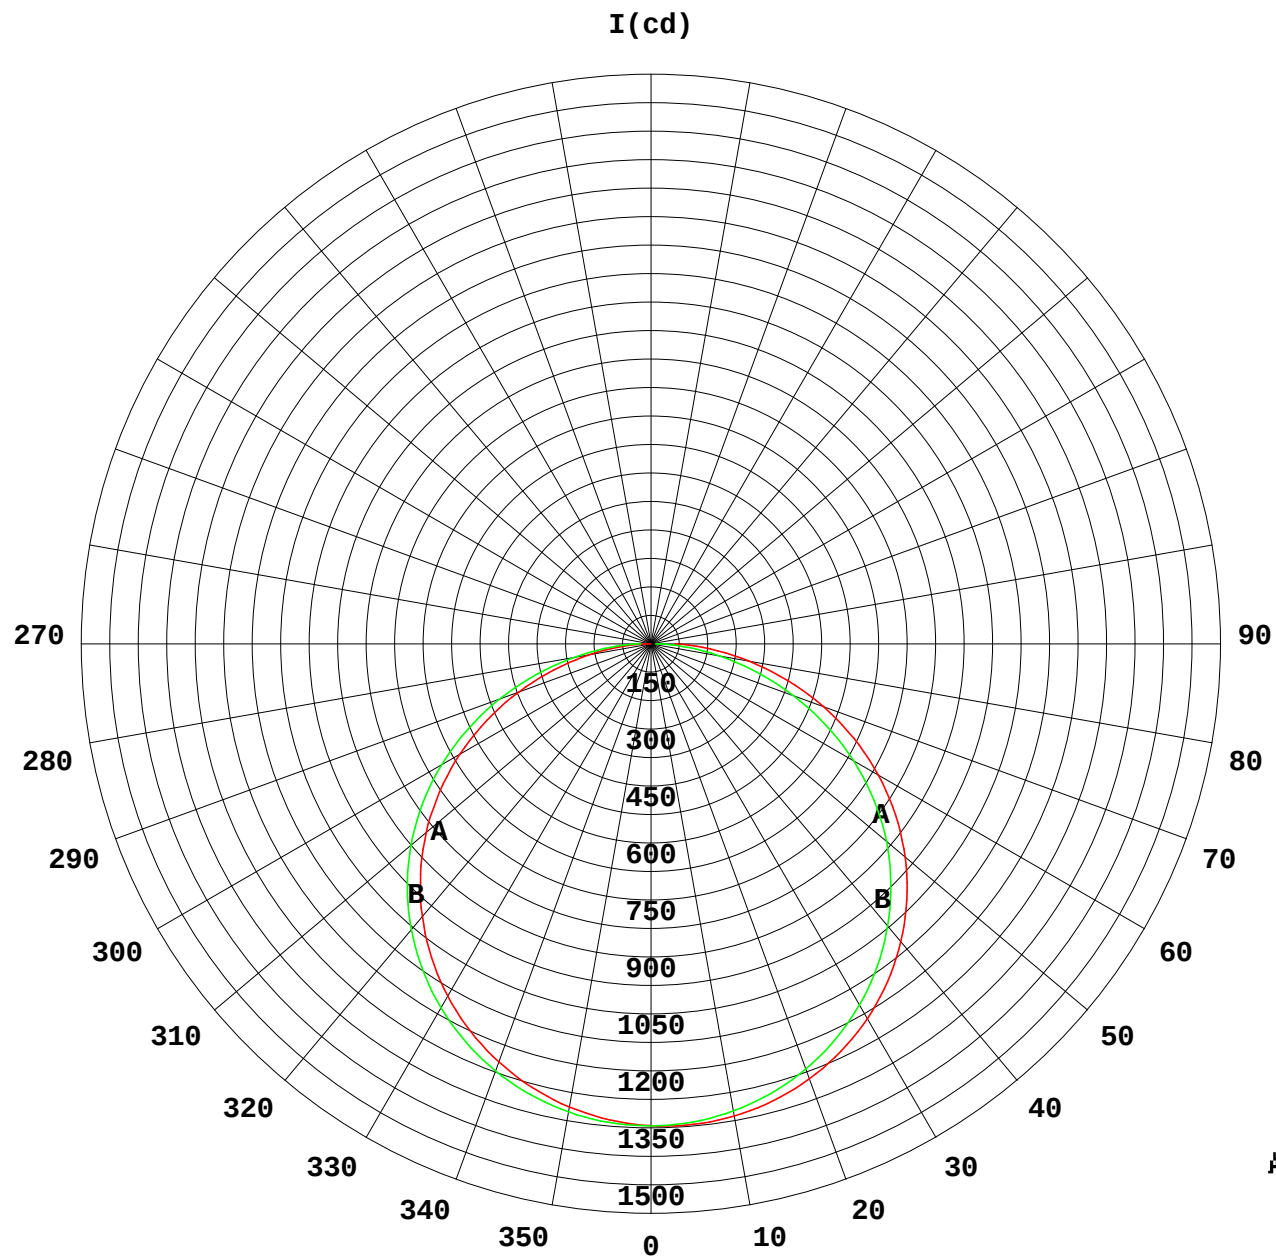

1000 lm

K = 1

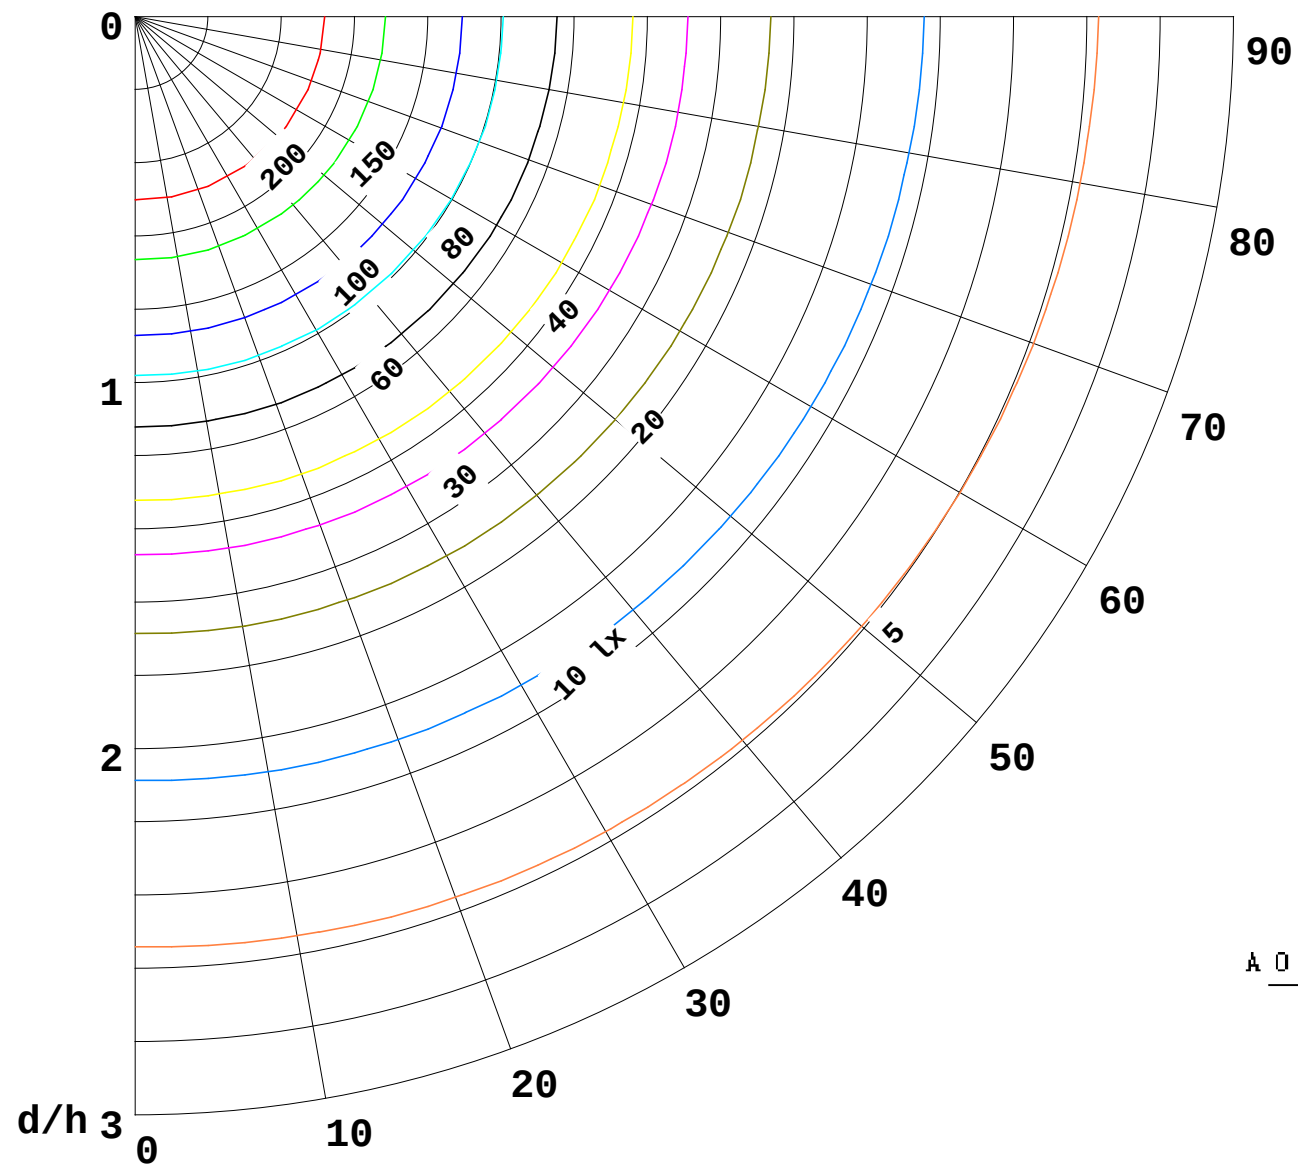

F

=

5000 lm

K

=

0.7

Hcc

=

0.0 m

Hfc

=

0.0 m

Eave

=

100 lx

Pcc

70

Pw

50

Pfc

30

Pcc

50

Pw

30

Pfc

20

