


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.35V I:0.2515A P:29.985W PF:0.9908 Freq:59.98Hz Lamp Flux:4341.99x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 144.81 lm/W			
MODEL		I _{max} (cd)	1391	S/MH(C0/180)	1.33
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	120-277	TOTAL FLUX(lm)	4342.0	h UP, DN(C0-180)	0.0,48.6
NOMINAL FLUX(lm)	4341.99	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.0,51.4
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	120	h down(%)	100.0	CIBSE SHR MAX	1.50

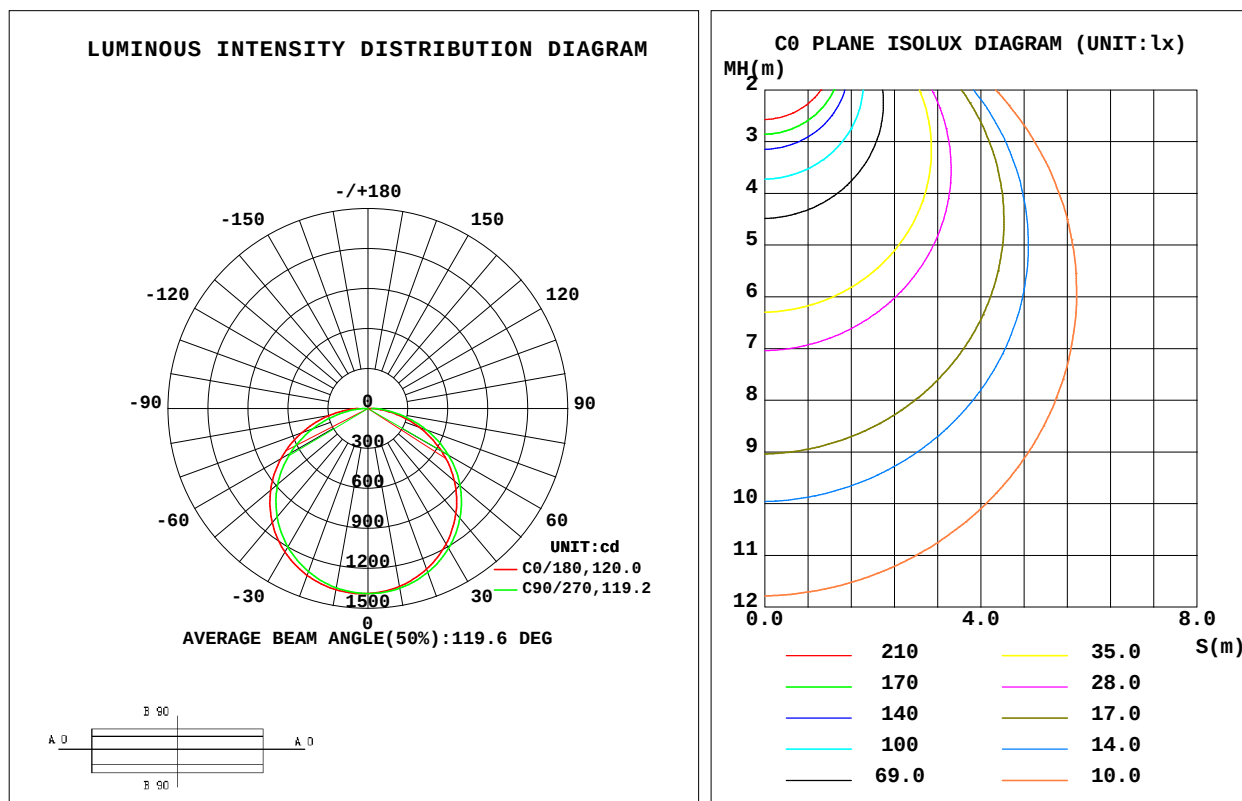

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:13 March 2024

α Range: 0 - 90DEG
 α Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.400
 Humidity:65.0%
 Test Distance:8.300m [K=1.0723]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

g	C0	C90	C180	C270					g	F zone	F total	%lum, lamp
10	1356	1369	1381	1367					0- 10	131.6	131.6	3.03, 3.03
20	1284	1309	1333	1304					10- 20	379.2	510.8	11.8, 11.8
30	1174	1210	1245	1201					20- 30	582.1	1093	25.2, 25.2
40	1027	1074	1118	1061					30- 40	715.7	1809	41.7, 41.7
50	846.3	903.0	954.6	886.0					40- 50	762.4	2571	59.2, 59.2
60	637.8	697.5	755.1	674.1					50- 60	712.9	3284	75.6, 75.6
70	406.3	463.9	527.2	436.5					60- 70	570.2	3854	88.8, 88.8
80	179.1	225.1	286.0	198.8					70- 80	357.8	4212	97, 97
90	1.198	30.67	70.02	13.58					80- 90	130.1	4342	100, 100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 13 March 2024

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 8.300m [K=1.0723]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINANCE LIMITATION CURVES

Test:U:120.35V I:0.2515A P:29.985W PF:0.9908 Freq:59.98Hz Lamp Flux:4341.99x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

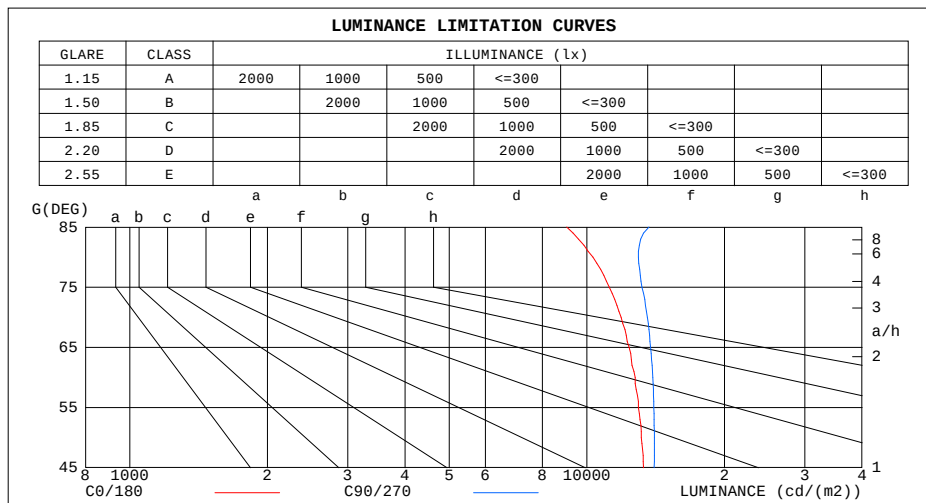

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	9032	13682
80	10316	12961
75	11200	13201
70	11881	13563
65	12367	13793
60	12755	13949
55	12978	14021
50	13166	14049
45	13304	14044

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 13 March 2024


g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 8.300m [K=1.0723]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.35V I:0.2515A P:29.985W PF:0.9908 Freq:59.98Hz Lamp Flux:4341.99x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.03	.98	.94	1.00	.96	.92	.96	.93	.90	.92	.89	.87	.89	.86	.84	.82
2.0	.89	.82	.76	.87	.80	.75	.83	.78	.73	.80	.75	.71	.77	.73	.70	.67
3.0	.78	.69	.62	.76	.68	.62	.73	.66	.61	.70	.64	.60	.68	.63	.59	.56
4.0	.69	.59	.52	.67	.59	.52	.65	.57	.51	.62	.56	.51	.60	.54	.50	.48
5.0	.61	.52	.45	.60	.51	.45	.58	.50	.44	.56	.49	.44	.54	.48	.43	.41
6.0	.55	.46	.39	.54	.45	.39	.52	.44	.38	.50	.43	.38	.49	.43	.38	.36
7.0	.50	.41	.34	.49	.40	.34	.47	.40	.34	.46	.39	.34	.44	.38	.33	.31
8.0	.45	.36	.30	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.34	.30	.28
9.0	.41	.33	.27	.41	.33	.27	.40	.32	.27	.39	.32	.27	.38	.31	.27	.25
10.0	.38	.30	.25	.38	.30	.25	.37	.29	.25	.36	.29	.24	.35	.29	.24	.23

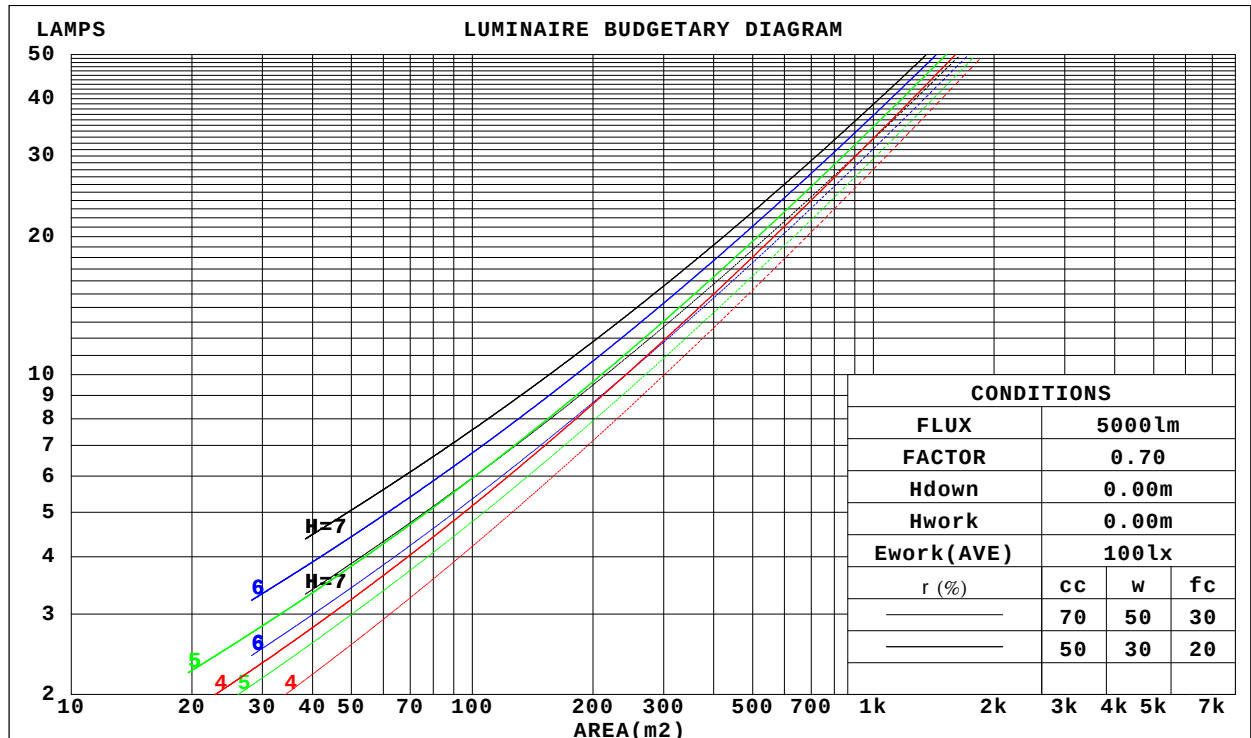

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:13 March 2024

g Range: 0 - 90DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity:65.0%
 Test Distance:8.300m [K=1.0723]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

WEC AND CCEC

Test:U:120.35V I:0.2515A P:29.985W PF:0.9908 Freq:59.98Hz Lamp Flux:4341.99x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:100-277v		DIM.:		SERIAL No.:	
MFR.:		SUR.:		Shielding Angle:	

r c c	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r f c	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.331	.188	.060	.324	.185	.059	.310	.178	.057	.298	.172	.055	.287	.166	.054	
2.0	.306	.168	.051	.300	.165	.051	.288	.160	.050	.277	.155	.049	.267	.151	.048	
3.0	.281	.149	.045	.275	.147	.044	.265	.143	.044	.255	.140	.043	.246	.136	.042	
4.0	.257	.134	.039	.252	.132	.039	.243	.129	.039	.235	.126	.038	.227	.123	.037	
5.0	.237	.121	.035	.233	.119	.035	.224	.117	.034	.217	.114	.034	.209	.112	.034	
6.0	.219	.110	.031	.215	.109	.031	.208	.106	.031	.201	.104	.031	.194	.102	.030	
7.0	.203	.100	.028	.200	.099	.028	.193	.098	.028	.187	.096	.028	.181	.094	.028	
8.0	.189	.093	.026	.186	.092	.026	.180	.090	.026	.175	.089	.026	.170	.087	.025	
9.0	.177	.086	.024	.174	.085	.024	.169	.084	.024	.164	.082	.024	.159	.081	.023	
10.0	.166	.080	.022	.164	.079	.022	.159	.078	.022	.155	.077	.022	.150	.076	.022	

r c c	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r f c	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.182	.156	.133	.156	.134	.114	.106	.092	.079	.061	.053	.046	.020	.017	.015	
2.0	.174	.132	.096	.149	.113	.083	.102	.079	.058	.059	.046	.034	.019	.015	.011	
3.0	.167	.114	.073	.143	.099	.063	.098	.069	.044	.057	.040	.026	.018	.013	.009	
4.0	.159	.101	.057	.136	.087	.050	.094	.061	.035	.054	.036	.021	.017	.012	.007	
5.0	.151	.091	.046	.130	.079	.040	.090	.055	.028	.052	.032	.017	.017	.011	.006	
6.0	.144	.083	.038	.124	.071	.033	.085	.050	.024	.050	.029	.014	.016	.010	.005	
7.0	.137	.076	.033	.118	.066	.028	.081	.046	.020	.047	.027	.012	.015	.009	.004	
8.0	.130	.070	.028	.112	.061	.025	.078	.043	.017	.045	.025	.010	.015	.008	.003	
9.0	.124	.065	.025	.107	.056	.022	.074	.040	.015	.043	.023	.009	.014	.008	.003	
10.0	.118	.061	.022	.102	.053	.019	.071	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:13 March 2024

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:8.300m [K=1.0723]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

UGR(Unified Glare Rating) Table

Test:U:120.35V I:0.2515A P:29.985W PF:0.9908 Freq:59.98Hz Lamp Flux:4341.99x1 lm											
NAME:					TYPE:			WEIGHT:			
SPEC.:100-277v					DIM.:			SERIAL No.:			
MFR.:					SUR.:			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.7	23.3	22.0	23.5	23.7	22.0	23.6	22.3	23.8	24.0	
	3H	23.3	24.7	23.6	25.0	25.2	23.8	25.2	24.1	25.4	
	4H	23.9	25.3	24.3	25.6	25.8	24.5	25.9	24.8	26.1	
	6H	24.4	25.7	24.8	26.0	26.3	25.1	26.4	25.4	26.7	
	8H	24.6	25.8	24.9	26.1	26.4	25.3	26.6	25.7	26.9	
	12H	24.7	25.9	25.0	26.2	26.5	25.5	26.7	25.8	27.0	
4H	2H	22.4	23.8	22.7	24.0	24.3	22.6	24.0	23.0	24.3	
	3H	24.2	25.4	24.5	25.7	26.0	24.6	25.8	24.9	26.1	
	4H	25.0	26.1	25.3	26.4	26.7	25.4	26.5	25.8	26.9	
	6H	25.6	26.6	26.0	26.9	27.3	26.2	27.2	26.6	27.5	
	8H	25.8	26.7	26.2	27.1	27.5	26.5	27.4	26.9	27.8	
	12H	25.9	26.8	26.4	27.2	27.6	26.7	27.6	27.1	27.9	
8H	4H	25.3	26.2	25.7	26.6	27.0	25.7	26.6	26.1	27.0	
	6H	26.1	26.9	26.5	27.3	27.7	26.6	27.4	27.1	27.8	
	8H	26.4	27.1	26.9	27.5	28.0	27.0	27.7	27.5	28.1	
	12H	26.6	27.2	27.1	27.7	28.2	27.4	28.0	27.9	28.4	
12H	4H	25.3	26.2	25.8	26.6	27.0	25.7	26.6	26.2	27.0	
	6H	26.2	26.9	26.6	27.3	27.7	26.7	27.4	27.1	27.8	
	8H	26.5	27.1	27.0	27.6	28.1	27.1	27.7	27.6	28.2	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.1 / - 0.4					+ 0.1 / - 0.3					

CIE Pub.117, 4342 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 5.1$)

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:13 March 2024

g Range: 0 - 90DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity:65.0%
 Test Distance:8.300m [K=1.0723]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

UTILIZATION FACTORS TABLE

Test:U:120.35V I:0.2515A P:29.985W PF:0.9908 Freq:59.98Hz Lamp Flux:4341.99x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	44	37	55	44	37	54	43	37	30
0.80	66	54	46	65	53	46	63	53	46	39
1.00	74	63	55	73	62	55	71	64	54	47
1.25	81	70	63	80	70	63	77	68	62	54
1.50	86	76	69	85	75	68	82	73	67	59
2.00	94	84	78	92	83	77	88	81	75	67
2.50	98	89	83	95	88	82	92	85	80	72
3.00	101	94	88	99	92	87	95	89	85	76
4.00	105	99	94	103	97	93	99	94	90	81
5.00	108	103	98	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:13 March 2024

g Range: 0 - 90DEG
 g Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.400
 Humidity:65.0%
 Test Distance:8.300m [K=1.0723]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOCANDELA DIAGRAM

Test:U:120.35V I:0.2515A P:29.985W PF:0.9908 Freq:59.98Hz Lamp Flux:4341.99x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

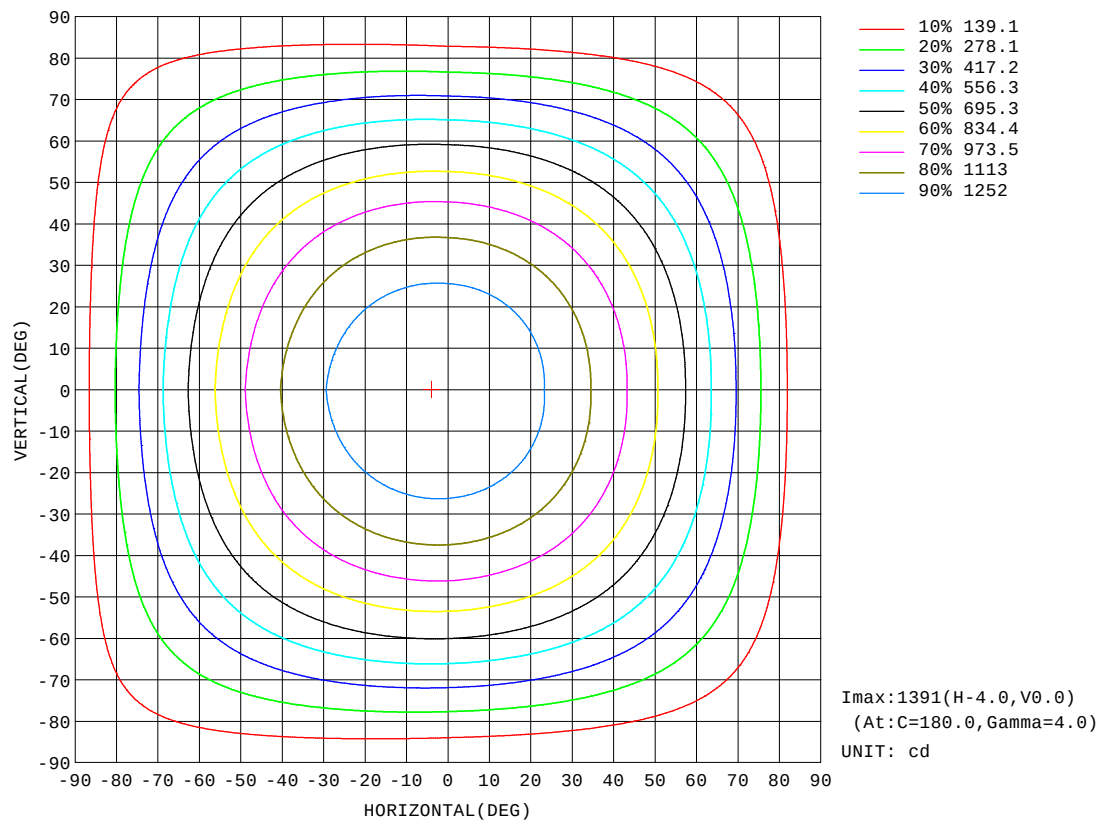


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:13 March 2024

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:8.300m [K=1.0723]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

AAI Figure

Test:U:120.35V I:0.2515A P:29.985W PF:0.9908 Freq:59.98Hz Lamp Flux:4341.99x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

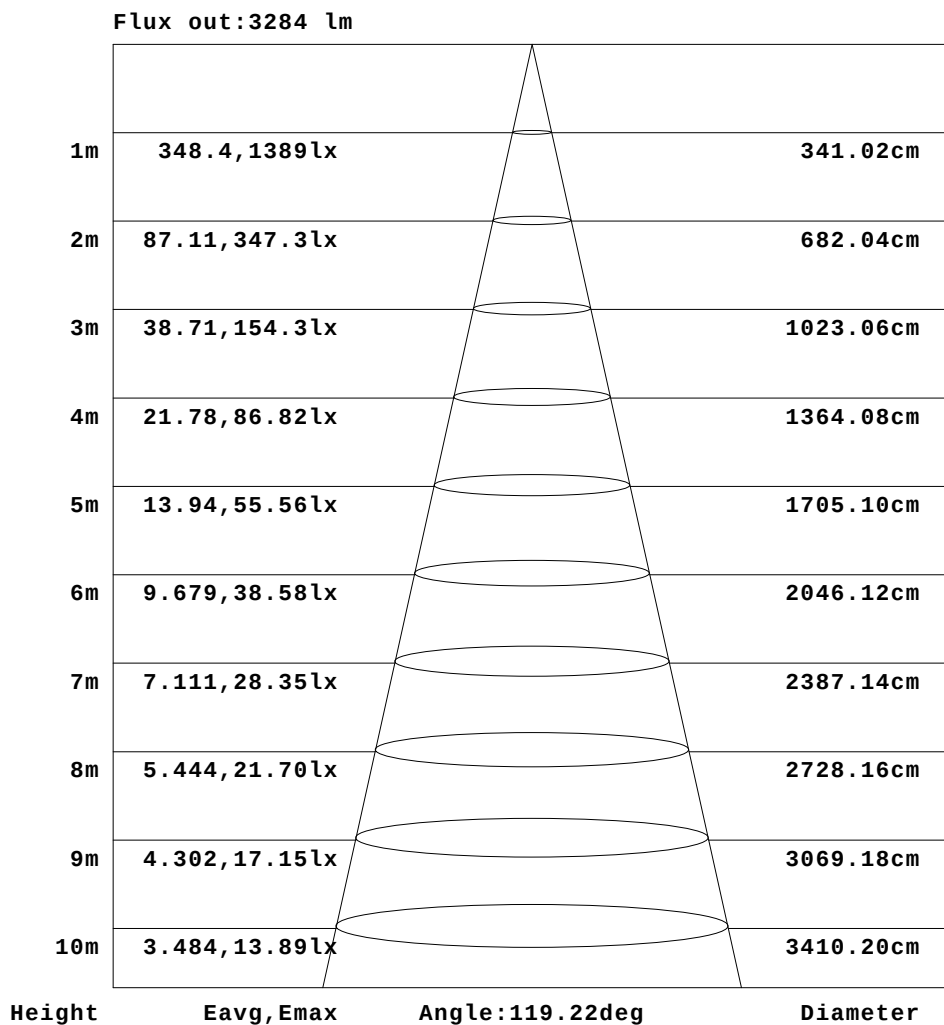

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:13 March 2024

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:8.300m [K=1.0723]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOLUX DIAGRAM

Test:U:120.35V I:0.2515A P:29.985W PF:0.9908 Freq:59.98Hz Lamp Flux:4341.99x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

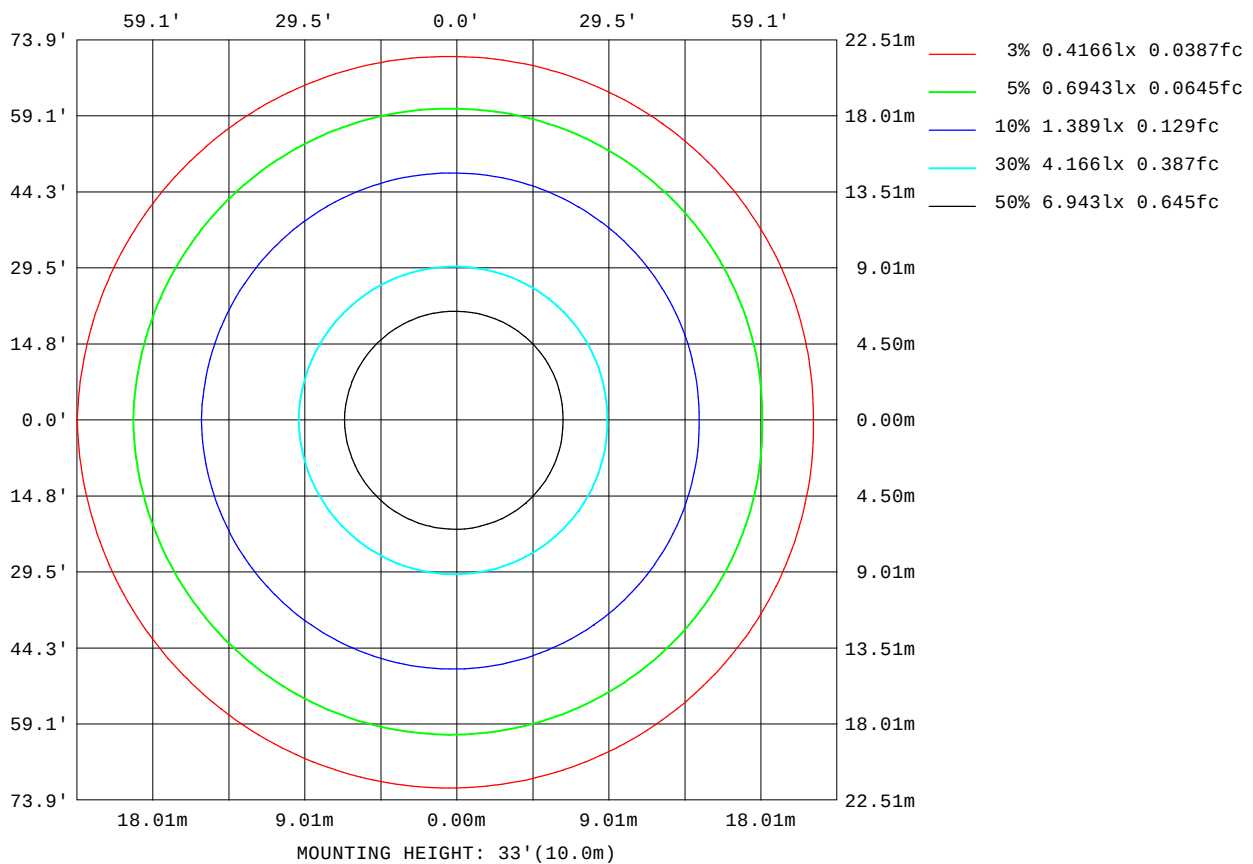

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 13 March 2024

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 8.300m [K=1.0723]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LED Avg.L Report

Test:U:120.35V I:0.2515A P:29.985W PF:0.9908 Freq:59.98Hz Lamp Flux:4341.99x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:100-277v	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	13800
L_0~180(75)av	13454
L_0~180(85)av	14429
L_90~270(65)av	13490
L_90~270(75)av	12685
L_90~270(85)av	12299
L_45(65)av	13696
L_45(75)av	13114
L_45(85)av	13435

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:13 March 2024

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:8.300m [K=1.0723]
Remarks:

Planar Illuminance Curve

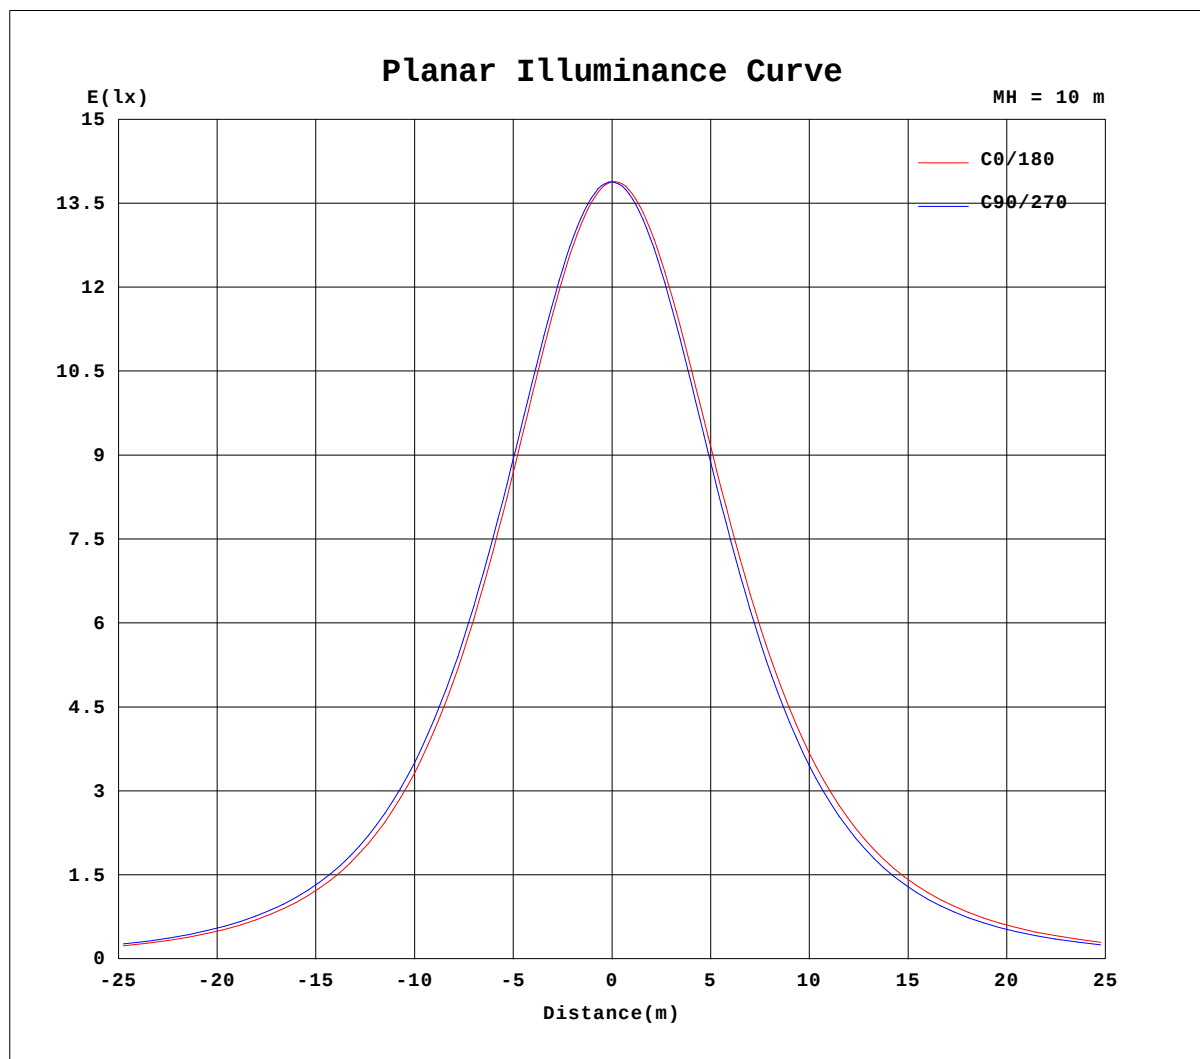

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 13 March 2024

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 8.300m [K=1.0723]
Remarks:

UNIT: cd

```

Range: 0 - 90DEG
Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:8.300m [K=1.0723]
Remarks:

```


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

Photometric Data Table [cd]

G/C	0.0	90.0	180.0	270.0
0.0	1389	1389	1389	1389
3.0	1383	1387	1390	1386
6.0	1374	1382	1389	1380
9.0	1361	1373	1384	1371
12.0	1345	1361	1374	1357
15.0	1324	1344	1362	1340
18.0	1301	1324	1346	1319
21.0	1275	1302	1326	1295
24.0	1244	1275	1303	1267
27.0	1210	1244	1276	1236
30.0	1174	1210	1245	1201
33.0	1134	1174	1211	1163
36.0	1090	1133	1174	1122
39.0	1043	1090	1132	1076
42.0	994.8	1043	1089	1029
45.0	940.7	993.1	1041	977.7
48.0	886.5	940.1	989.7	923.3
51.0	827.5	884.1	936.2	866.1
54.0	765.5	824.7	878.7	805.0
57.0	703.0	762.1	817.9	740.4
60.0	637.8	697.5	755.1	674.1
63.0	567.9	629.5	688.8	604.7
66.0	498.4	559.4	620.5	533.2
69.0	429.6	488.4	550.6	461.1
72.0	359.8	415.5	478.9	387.6
75.0	289.9	341.7	406.6	314.9
78.0	222.8	271.3	333.8	244.4
81.0	157.6	203.0	262.9	176.3
84.0	97.54	139.0	194.7	114.4
87.0	43.56	81.73	130.7	59.26
90.0	1.198	30.67	70.02	13.58


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 13 March 2024

g Range: 0 - 90DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 8.300m [K=1.0723]
Remarks:

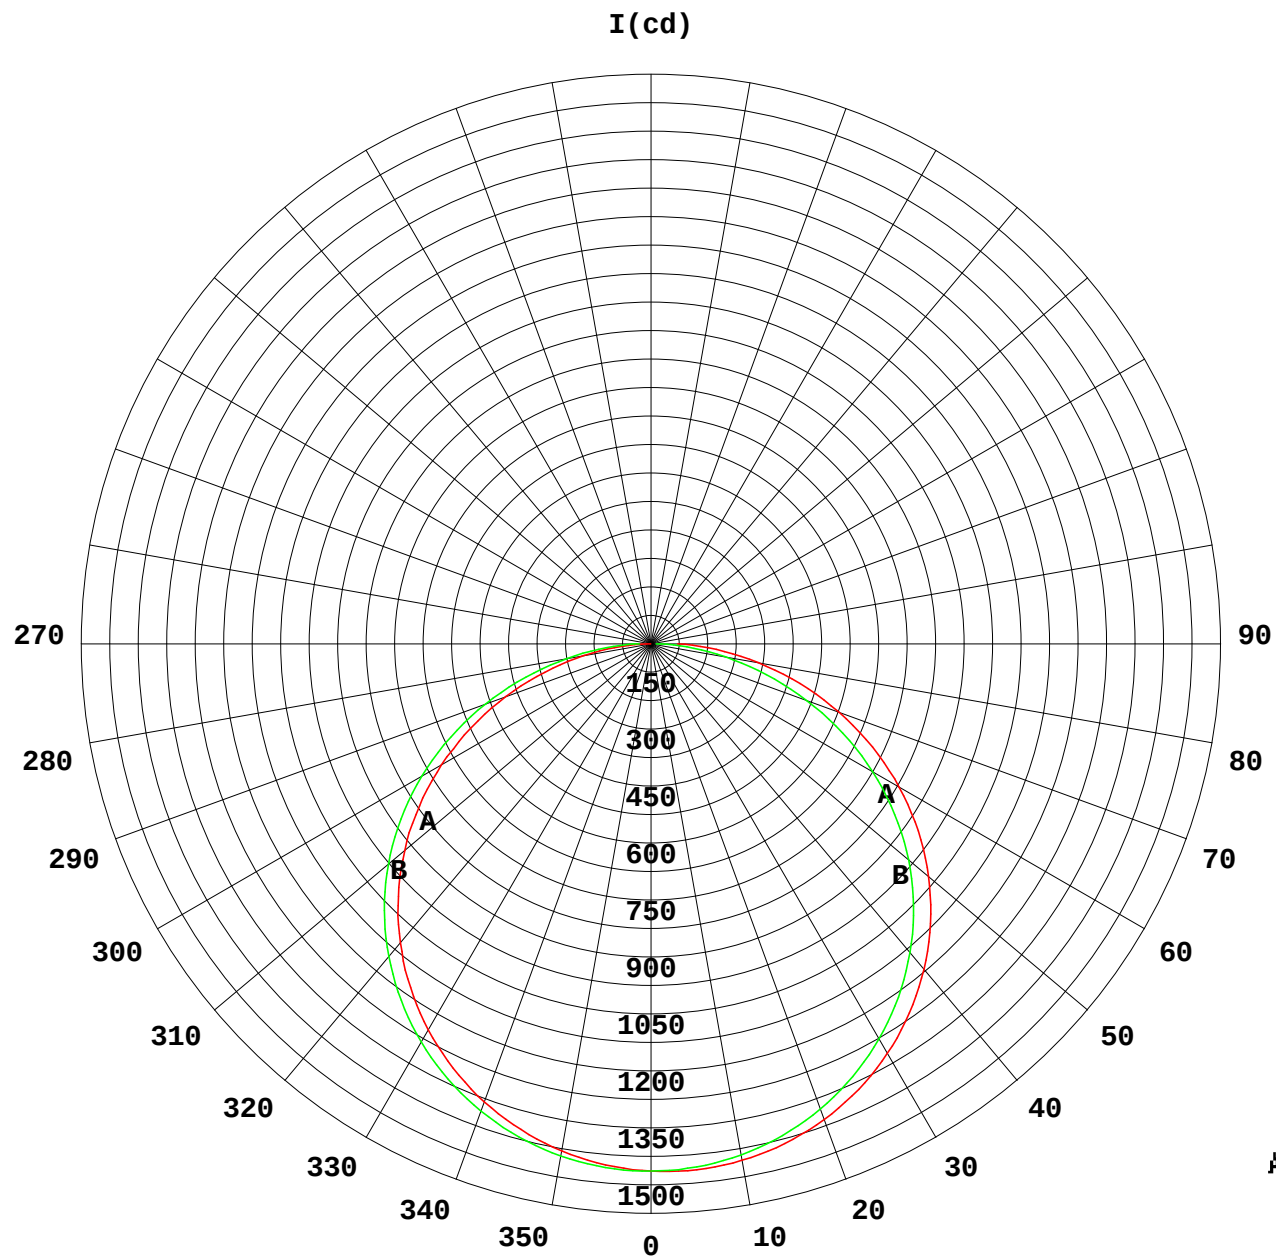

1000 lm

K = 1

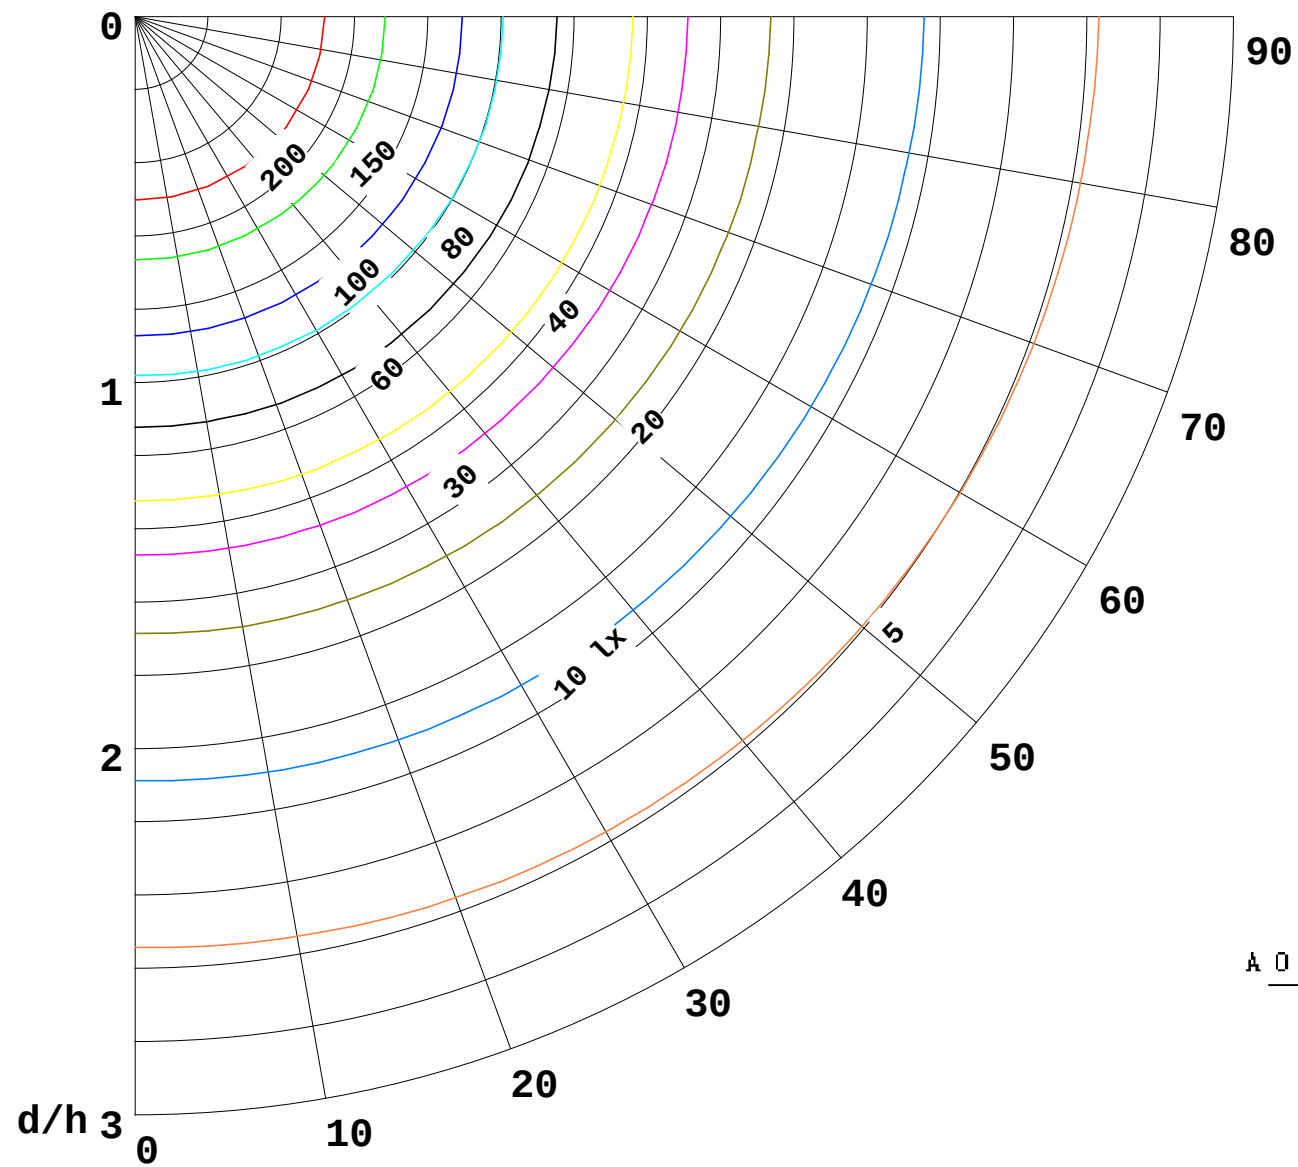

F = 5000 lm

K = 0.7

Hcc = 0.0 m

Hfc = 0.0 m

Eave = 100 lx

Pcc

Pw

Pfc

70

50

30

50

30

20

